

INSTALLATION INSTRUCTIONS FOR 4357-593

For Flush Mount Ceiling Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove the old fixture and all hardware from junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the two studs (A) into the pre-drilled holes in the mounting plate spaced the same distance apart as the holes in the fixture (H).
4. Attach the mounting plate to the outlet box using the two junction box screws (Size: #8-32*1/2"L). The side of the mounting plate marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as follows (Fig.2). Connect the black wire from the fixture to the black house (hot) wire; connect the white wire from the fixture to the white house (neutral) wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connects fixture's ground wire to it. Other wise attach the bare copper fixture wire to the green ground screw (Size: #8-32*3/8"L) on the crossbar. Tuck the wire connections neatly into the ceiling junction box as you are holding the fixture assembly toward the ceiling.

COMPLETING THE ISNTALLATION (Fig. 1)

6. Attach the tube (G) and the shade (D) onto the socket of fixture body (H), and then lock it securely with the check ring (B).
7. Install the light bulbs (not included) in accordance with the fixture's specifications: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
8. Put the fixture body (H) onto the junction box, aligning screws on mounting plate with mounting holes in canopy and lock it securely with ball nut (E).
9. Hang the crystals (F) and the crystals (I) to the loop of the fixture body (H).
10. Hang the crystal (C) to the bottom of the fixture body (H).

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

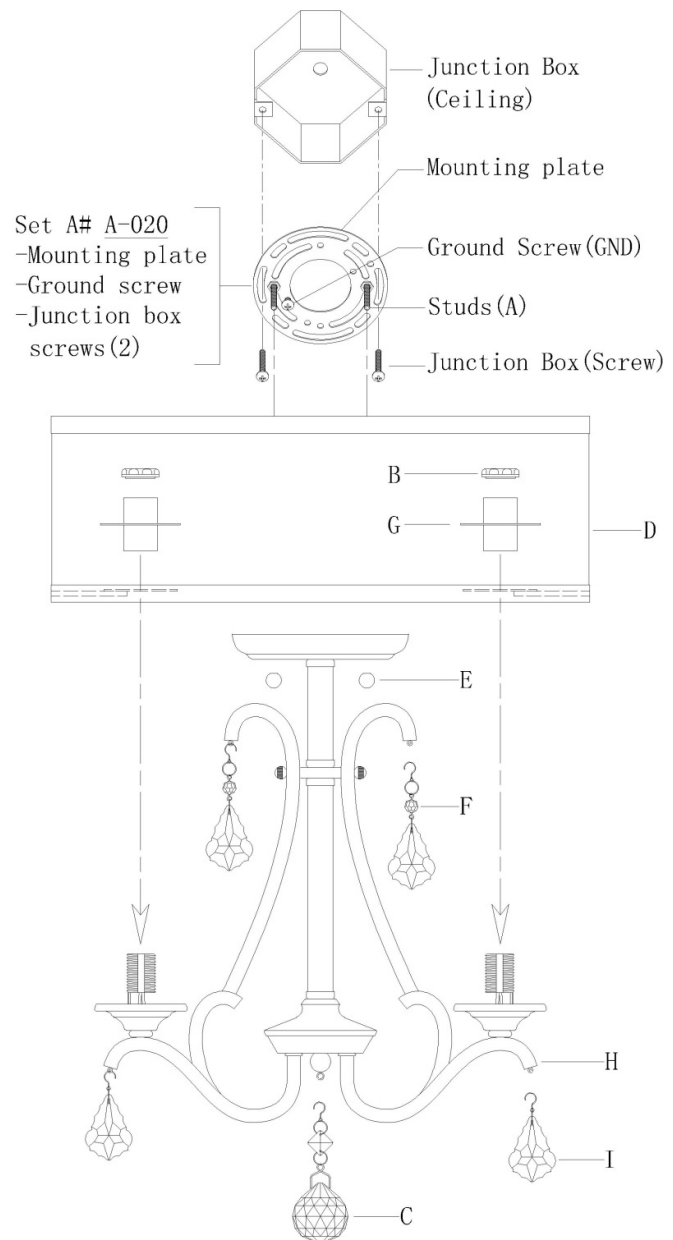


Fig.2

