

# INSTALLATION INSTRUCTIONS

For Model 4398-573

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

## ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the circuit breaker and remove old fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach glass (L) to the inner side of fixture arm (H), adjust the hole of them to align the holes, then secure them by threading the two screws (J) with plastic washer (I) until snug. Repeat this step for glass (K) and (J).
4. Install the bulbs in accordance with the fixture's specification. (DO NOT EXCEED THE MAXIMUM WATTAGE RATING!!)

## HANGING THE FIXTURE (Fig.1)

5. Thread nipple (E) through crossbar, then place lock washer (D) over end of nipple (E) protruding through crossbar (A) and thread hex nut (C) onto nipple (E) until tight. Take this crossbar (A) assembly and mount to ceiling outlet box with outlet box screws (B). Tighten screws securely with screwdriver. The side of the crossbar marked "GND" must face out.
6. Using one pair of pliers, open one end of chain and connect it to the loop of arm (H), at the top of the fixture. Be sure to close chain link completely. Repeat this step for the second loop.
7. By measuring, determine correct number of links needed for proper hanging height. Using pliers disconnect and discard remaining chain.
8. Weave electrical wire and ground wire up chain and push through center hole of the ceiling loop (F).
9. Repeat step seven for second loop, adjusting chain to desired length and connect it to the ceiling loop (F).

## CONNECTING THE WIRES (Fig. 2)

10. At this point connect the electrical wires as shown in (Fig.2). Making sure all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wires (green or bare copper) connect fixture's ground wire to it. Otherwise connect fixture's ground wire directly to the crossbar (A) using the green screw provided.
11. Tuck these wire connections neatly into the outlet box and then raise the canopy with ceiling loops (F) and secure onto nipple stub, tightening with cap nut (G).

Fig.1


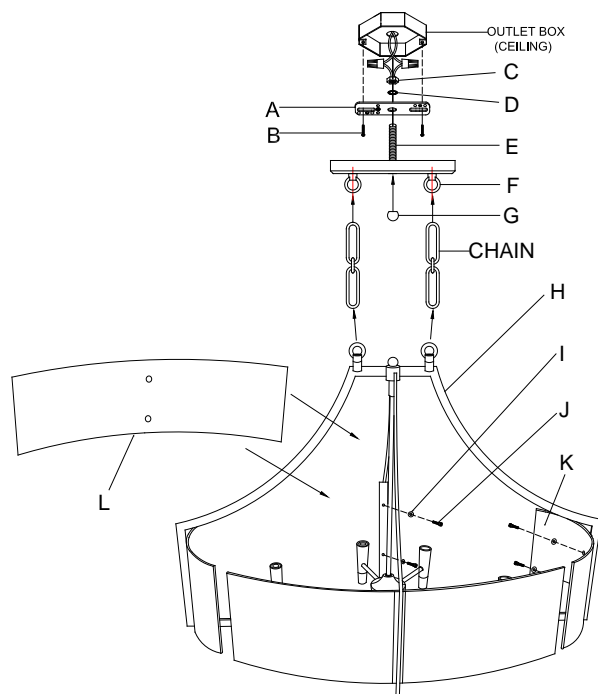


Fig. 2



**Your installation is now complete. Return power to the junction box and test the fixture.**

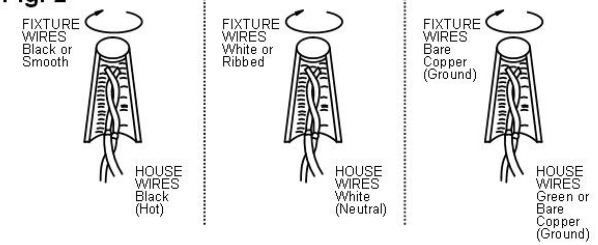

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.