

## INSTALLATION INSTRUCTION FOR FIXTURE #4582-672

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### MOUNTING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from wall. Including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Attach circular strap (B) to the outlet box using the outlet box screws (C). The side of circular strap (B) marked "GND" must face out.


### CONNECTING THE WIRES (FIG. 2)

4. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap (B) using the green screw provided.
5. Tuck the wire connections neatly into the outlet box.


### COMPLETING THE INSTALLATION (Fig.1)

6. Place fixture wall plate (D) over circular strap (B) and secure with nuts (E).
7. Slide candle covers (G) over sockets (F), then place tube covers (H) over candle covers (G).
8. Insert shade (J) within frame (K) and secure frame to wall plate (D) using mounting screws (L).
9. Screw crystal ball (M) to coupling (N).
10. Install (2) two candelabra base bulbs (I) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
11. The leaves on the lamp body can be manually adjusted to change their shape of your preference.

Your installation is now complete. Return power to the outlet box and test the fixture.

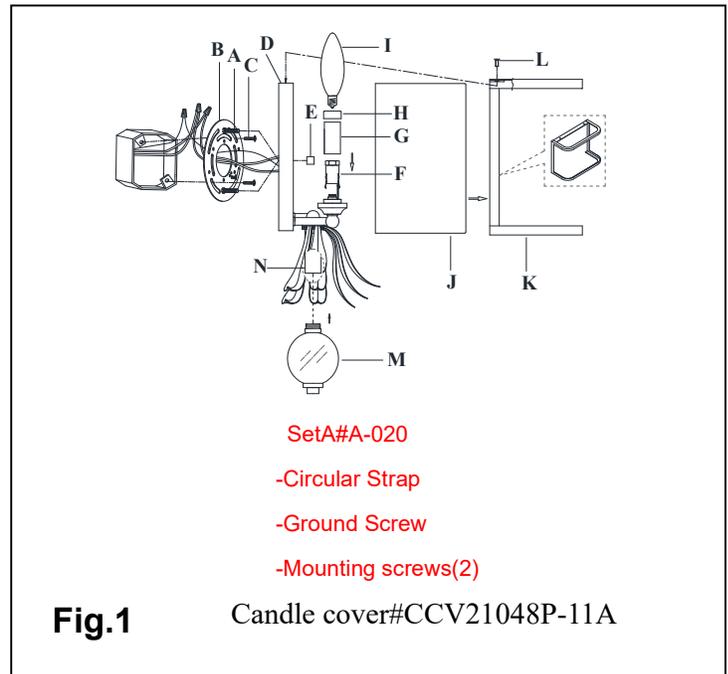

**Fig.2**

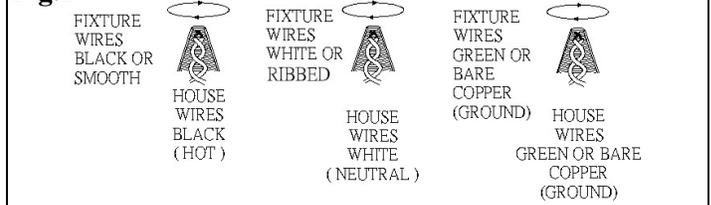

**Note: Illustration (Fig. 1)(Fig.2) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

MIN 75 °C SUPPLY CONDUCTORS



american  
lighting  
association