

INSTALLATION INSTRUCTIONS FOR 4742-206

For Wall Mount Fixture

©Minka Lighting, Inc.

This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws.

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE

Installation (see fig.1)

1. Disconnect power at main electrical panel before installation.
2. Thread the two mounting screws about 1/4" into the pre-drilled holes in the mounting plate, spaced about the same distance apart as the holes in the fixture back plate. Attach the mounting plate to the junction box using two junction box screws. The side of the mounting plate marked "GND" must face out.
3. Guide fixture wires through hole in center of mounting plate.
4. Follow wiring instructions carefully (see fig.2).
5. Mount fixture by aligning mounting holes in fixture back plate with mounting screws and threading ball nuts (H) onto mounting screws.
6. Mark the location for plastic anchors on wall. Be sure to check for level before installing plastic anchors.
7. Mount the plastic anchor to the wall and use the wood screws to tighten the back plate of the fixture body (F).
8. Place the socket sleeve (E) and the spider ring (D) over the socket of the fixture body (F), then lock it securely with the check ring (C). Install the light bulbs (not included) in accordance with the fixture's specifications: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**, and put the glass shade (B) on to the spider ring (D), then put the decorate frame (A) onto the glass shade (B).
9. Attach the crystal (G) to the small ring of the fixture body (F) as shown.
10. You are now finished and may restore power to the fixture.

Wiring (see fig.2)

1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the mounting plate.
2. Tuck the wire connections neatly into the wall junction box.

Fig.1


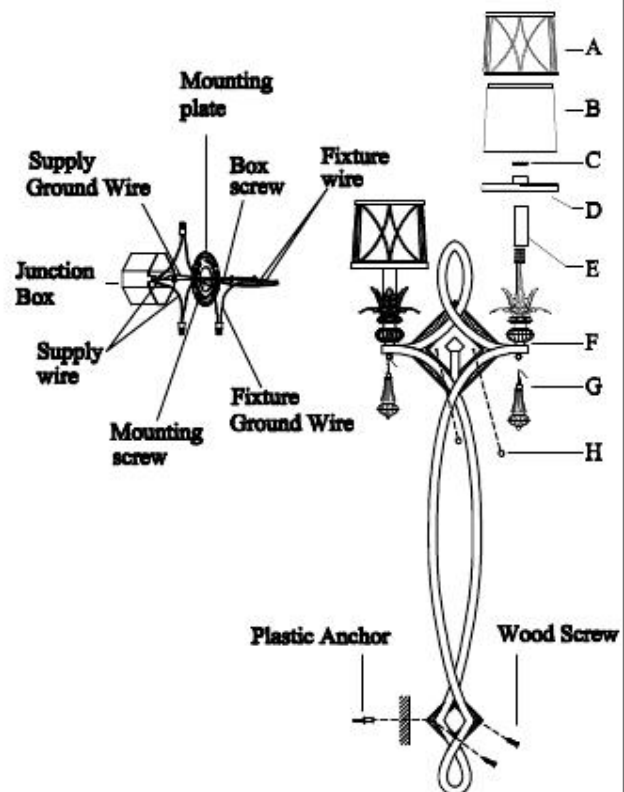


Fig.2

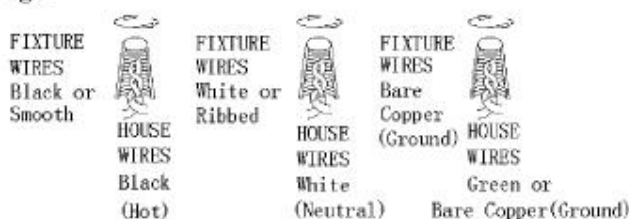

Intertek

american
 lighting
 association