

INSTALLATION INSTRUCTIONS FOR FIXTURE #4820-77

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from ceiling including the mounting hardware.
2. Carefully remove the new fixture from the packaging and check that all parts are included as shown in the illustration.
3. Install a 1/4" IPS pipe (Y1) (not provided) with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box as shown.
4. Secure the hex nut (Y2) onto the pipe (Y1) and then secure the hickey (Y3) tightly.
5. Thread the tube (K) to bottom of the column (J).
6. Thread the tube (K) to the nipple (M).
7. Determine the desired hanging height and thread tube (H1 & H2) to the nipple (I). Pass the wires carefully through each tube as you assemble.
8. Thread the loop (F) to top of the tube (H1 & H2).
9. Using quick link (G) hang fixture via loops (F) on bottom of canopy (D) and top of the tube (H1 & H2).

MOUNTING THE FIXTURE (Fig. 1)

10. Feed the fixtures wires and safety cable through the ceiling loop, and mounting plate (A) and allow safety cable to exit through the side of hickey (Y3). Run safety cable through the hickey (Y3) one circle and secure safety cable with set screw assembly and set screws.
11. Attach the mounting plate (A) to the outlet box using the outlet box screws (B). The side of the mounting plate (A) marked "GND" must face out.
12. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the ground wire from the fixture to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green ground screw provided.
13. After wires are connected, tuck them carefully into the ceiling junction box.
14. Attach the canopy (D) onto the mounting plate (A) by protruding 2 mounting screws (C) through the mounting holes of the canopy (D) and secure with the nuts (E).
15. Thread the caps (N) to the connectors (S) to hang the upper steel ring (U).
16. Attach the longer support rods (W) to the hooks (V) on the middle steel ring (U) to hang the middle steel ring (U).
17. Attach the shorter support rods (W) to the hooks (V) on the lower steel ring (U) to hang the lower steel ring (U).
18. Secure the longest crystals (R) to the upper steel ring (U) with the ball finials (T).
19. Secure the middle crystals (R) to the middle steel ring (U) with the ball finials (T).
20. Secure the shortest crystals (R) to the lower steel ring (U) with the ball finials (T).
21. Install T8 bulbs (not included) into the sockets (Q).

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. Return power to the outlet box and test the fixture.

WARNING: This luminaire must be mounted or supported independently of an outlet box.



Fig.1

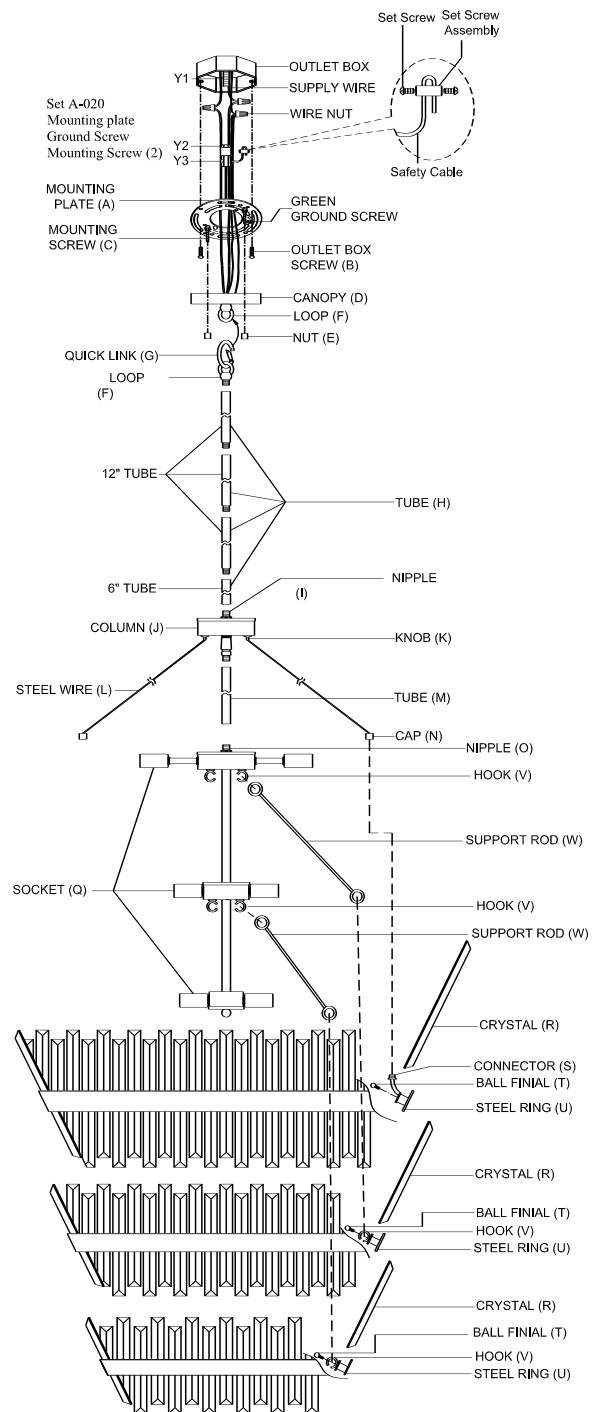


Fig.2

