

# INSTALLATION INSTRUCTIONS

Item#4942-570

## READ AND SAVE THESE INSTRUCTIONS

**WARNING SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### HANGING THE FIXTURE (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove old fixture, including mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Thread the center column assembly (O) onto the nipple (M).
4. Attach the mounting plate (A) to the junction box with mounting screws (B) (Size: #8-32N\*L0.6"). The side of the mounting plate marked "GND" and two convex points must face out.

### CONNECTING THE WIRES (Fig. 2)

5. At this point, connect the electrical wire as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate using the green screw provided.

### COMPLETING THE INSTALLATION (Fig. 1)

6. Install (3) three medium base bulbs up to 100 watts each or CFL or LED equivalent (not included) in accordance with fixture specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!).** **(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
7. Thread the nipple (I) to socket assembly (F) and tighten it with hex nut (N).
8. Place the glass panels (G) on the inner of the metal frame (H) and secure them by using clips.

**Notes: Please ensure the proper alignment of each glass panel to avoid gaps.**

9. Secure socket assembly (F) to metal frame (H) with short screw (E).
10. Raise the ceiling cap (C) over the mounting plate (A), and then secure it with mounting screws (D).
11. Attach glass shield (J) and bottom cover (K) over the nipple (I) on the bottom of the socket assembly (F). Then secure glass shield (J) and bottom cover (K) on metal frame (H) with finial (L). (Do not over tighten.)

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig. 1


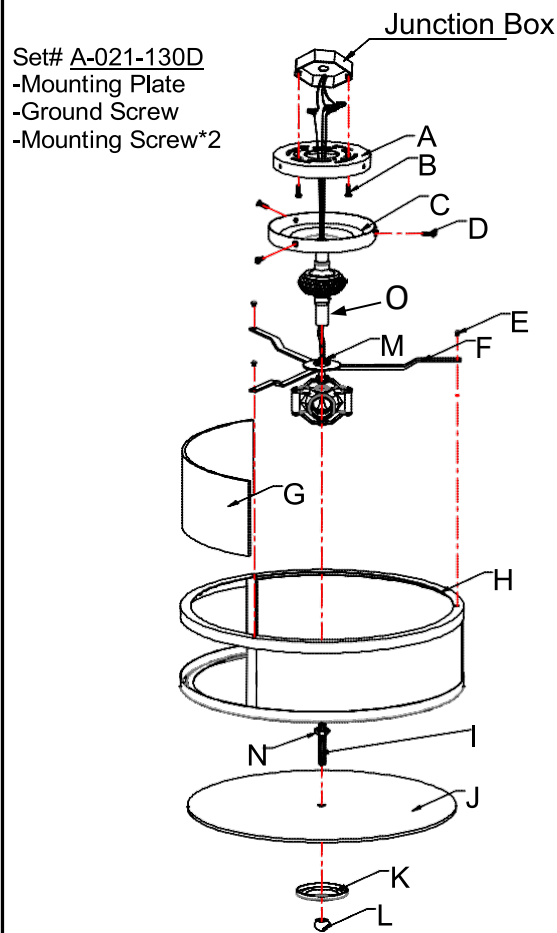


Fig. 2



**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

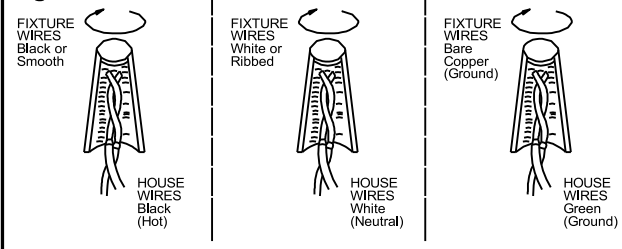