

INSTALLATION INSTRUCTIONS

Item#5267-66A (New. 2023/12/08)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Determine the desired hanging height and thread rods (I & H) to all thread on fixture (J). Carefully feed wires through each rod as you assemble. Note: Remove all thread, if installing with one 6" rod only.
4. Attach fixture canopy (E) by threading onto rod (H).
5. Carefully insert glass panel (K) into outer frame of fixture body (J), then secure them by pressing clips on outer frame of fixture body (J).
6. Carefully insert glass panel (L) into inner frame of fixture body (J), then secure them by pressing clips on inner frame of fixture body (J).
7. Thread canopy screws (B) into pre-drilled holes in mounting plate (A). Spaced same distance apart as holes in canopy (E), and secure with nuts provided. The length of canopy screws (B) may be adjusted if necessary.
8. Attached mounting plate (A) to outlet box (Not included) using mounting screws (C) (Size: #8-32N*L1"). The side of mounting plate (A) marked with "GND" must face out.
9. The support cable (F) is provided to support the weight of fixture while wiring. Align fixture to mounting plate (A) and attach hook on end of support cable (F) into a slot located on mounting plate (A). Carefully allow support cable (F) to support weight of fixture while wiring (Fig.1).

CONNECTING THE WIRES (Fig. 2)

10. Connect the electrical wires as shown in fig.2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using ground screw provided.
11. Tuck the wire connectors neatly into the outlet box.

FINISHING THE INSTALLATION (Fig.1)

12. Place canopy (E) over canopy screws (B) and secure with finials (G).
13. Install (6) six candelabra base bulbs up to 60 watts or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to outlet box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

Set# A-020

-Mounting Screw *2


-Ground Screw

-Mounting Plate

6" Rod# W35-H-66A


12" Rod# W35-1-66A

Finial# 10526566AFF10

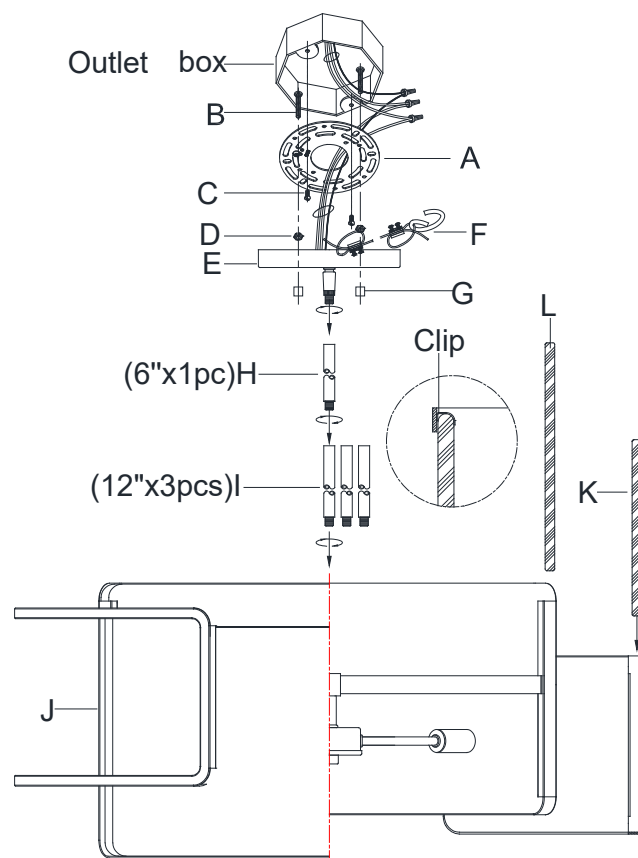

Code	Glass#	QTY/per item
K	G5267-1	2
L	G5267-2	2

Fig. 2

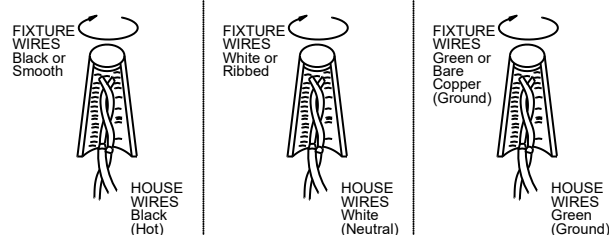

Page 1/2

american
lighting
association

5267-66A

Replace swivel to be loop system (Fig.3)

1. Unscrew the nut (E4), then remove lock washer (E3), support cable (F), flat plate (E2), swivel (E1) and rod (H) from the canopy (E).
2. Attach one loop (M) to the other loop (M) by using quick link (N).
3. Place one loop (M) over the canopy (E), then place flat plate (E2), support cable (F) and lock washer (E3) onto the protruding all thread at the top of loop (M), securing with hex nut (E4).
4. Install the loops (M) onto the top of rod (H).

Fig.3

