

INSTALLATION INSTRUCTION FOR FIXTURE #5382-84

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from wall. Including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Put the plastic plug nail (N) into the wall, using the wood screw (O) & box screw (J) attach the mounting plate (I) to the wall. The side of the mounting plate marked "GND" must face out.

CONNECTING THE WIRES (FIG. 2)

4. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting strap using the green screw provided.
5. Tuck the wire connections neatly into the wall outlet box.

MOUNTING THE FIXTURE (FIG. 1)

6. Attach the fixture wall plate over the mounting plate (I) and securing with mounting screws (H) until snug.
7. Place the glass shade (F) in the ring (K), then secure finial (M) tightly.
8. Install the bulb in accordance with fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
- 9.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

A-020-380120

-Mounting Plate

-Ground screw

**-Mounting
screws (2)**

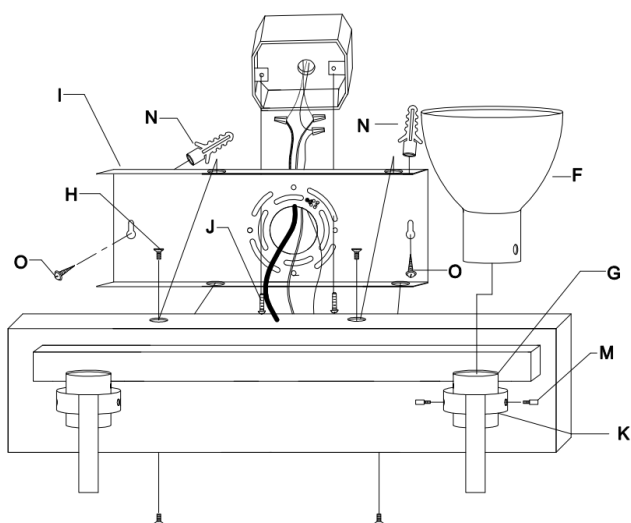


Fig.2

