

INSTALLATION INSTRUCTIONS

Item#6274 (New. 09/14/2012)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig. 1)

1. Shut off the power at the circuit breaker and remove the old fixture from the ceiling, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the screws (D) into the pre-drilled holes in the circular strap (B) spaced the same distance apart as the holes in the top plate of fixture body (F); then secure them with the hex nuts (E).
4. Attach the circular strap (B) to the junction box with the mounting screws (C) (Size: #8-32N*L0.5"). The side of the circular strap marked "GND" must face out.



CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar using the green screw provided. After wires are connected, tuck them carefully into the outlet box.

FINISHING THE INSTALLATION (Fig. 1)

6. Place fixture body (F) into two screws (D) and secure tightly with cap nuts (G).
7. Place the glass shade (H) and Metal Ring (J) over the socket and secure with screw shell (H).
8. Install the light bulb(s) (included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!). (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the outlet box and test the fixture.

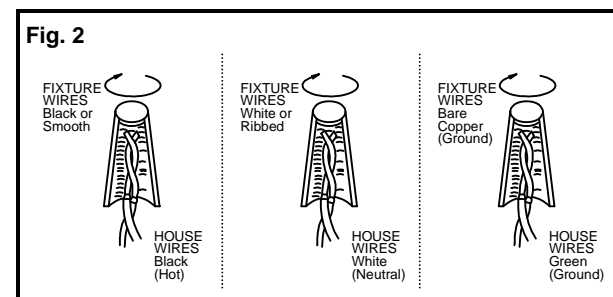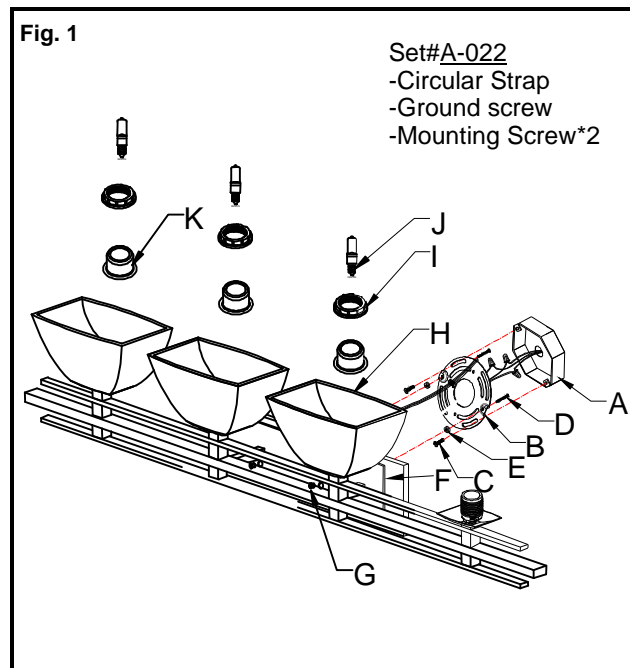

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

