

# INSTALLATION INSTRUCTIONS

For Model # 6275 (New 06/07/2012)

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## MOUNTING THE FIXTURE (Fig. 1)

1. Shut off power at the circuit breaker and remove old fixture from ceiling, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Secure Circular Strap (B) using Screw (C) to the Outlet Box (A). The side of the Circular Strap marked "GND" must face out.
4. Screw Stud (D) into the screw hole of Circular Strap (B).

## CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the crossbar using the Green Screw provided.

## FINISHING THE INSTALLATION (Fig. 1)

6. Place Fixture Body (E) into two Studs (D) and secure tightly with Cap Nut (F).
7. Install halogen bulb into socket in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
8. Place Bulb Shield (G) onto the socket to protect the bulb, then secure with Screw (H) tightly as shown in Fig. 1
9. Place Glass Shade (I) along with lock washer (J) onto light cup over Bulb Shield and socket, then secure with screw (K).

Your installation is now complete. Return power to the outlet box and test the fixture.

**Note:** Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1


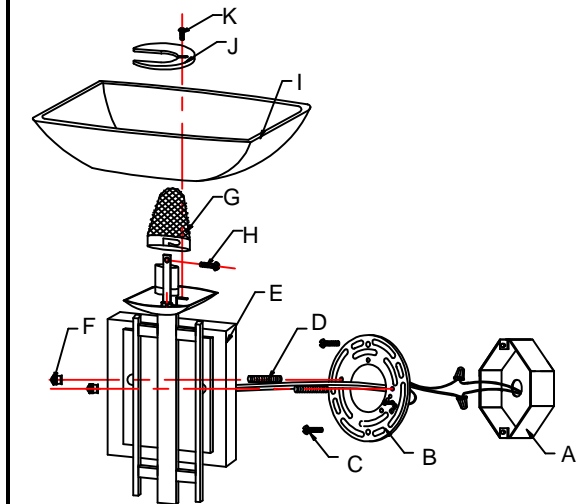


Fig. 2



MIN 90°C SUPPLY CONDUCTORS

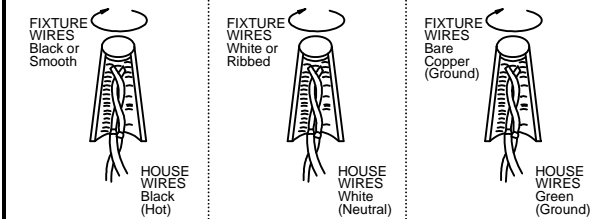