

INSTALLATION INSTRUCTIONS

Item# 6707-66 (New. 2023/12/08)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Align hole of shape plate (Q) to hole of bottom ring (K), securing with screws (S).
4. Align top hole of shape plate (Q) to all thread of top ring (J), securing with finial (R).
5. Determine the desired hanging height and thread rods (I & H) to coupling on fixture (J). Carefully feed wires through each rod as you assemble. Note: Remove all thread, if installing with one 6" rod only.
6. Install swivel (G) onto top of rod (H).
7. Place strip plate (D), canopy (E), support cable (F) and lock washer (N) over swivel (G), secure with hex nut (M).
8. Thread other end of all thread into crossbar (A), then use lock washer and hex nut (C) to secure all thread into crossbar. Note: The length of all thread into crossbar may be adjusted if necessary.
9. With a drill (Not included), make two holes on wall and insert anchors.
10. Take crossbar assembly and mount it to ceiling outlet box (Not included) with mounting screws (B) (Size: #8-32N*L1") and large screws (L). The side of crossbar marked with "GND" must face out.
11. The support cable (F) is provided to support the weight of fixture while wiring. Align fixture to crossbar (A) and attach hook on end of support cable (F) into a slot located on crossbar (A). Carefully allow support cable (F) to support weight of fixture while wiring (Fig.1).

CONNECTING THE WIRES (Fig. 2)

12. Connect the electrical wires as shown in fig.2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to crossbar (A) using the ground screw provided.
13. Tuck the wire connectors neatly into the outlet box.

FINISHING THE INSTALLATION (Fig.1)

14. Raise canopy (E) over all thread and secure with nut (O) and decorative cap (P).
15. Install (5) five medium base bulbs up to 60 watts or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**
16. Hook stone strings (B7) and crystal strings (A7) to bottom ring (K) cyclically.
17. Hook stone strings (B7) and crystal strings (A7) to top ring of fixture (J) cyclically.

Fig. 1

Set# A-020-
-Mounting Screw *2
-Ground Screw
- Crossbar

6" Rod# W30-H-66
12" Rod# W30-1-66



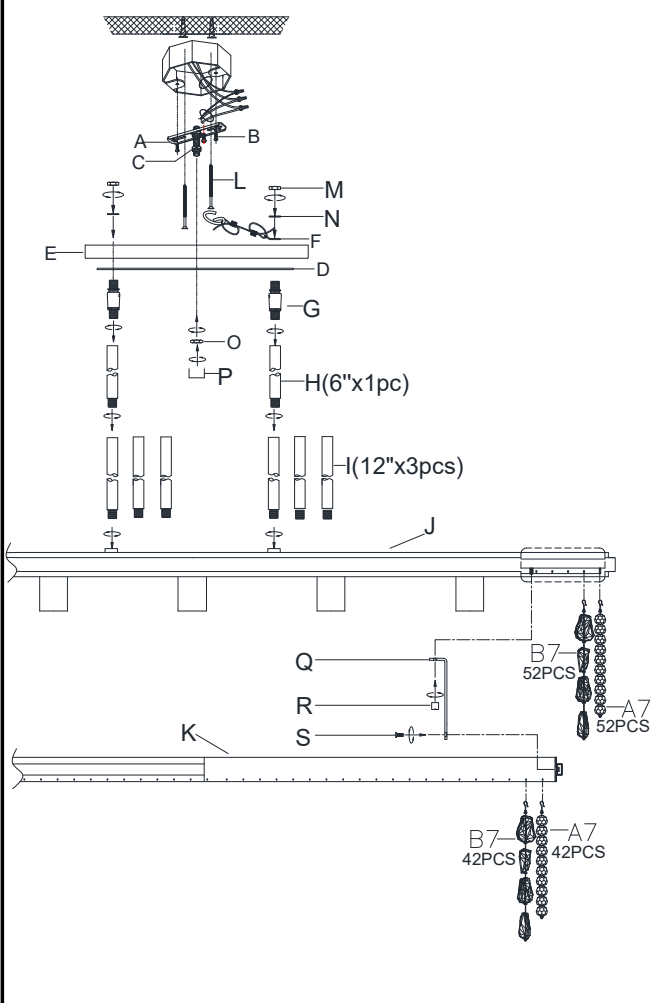


Fig. 2

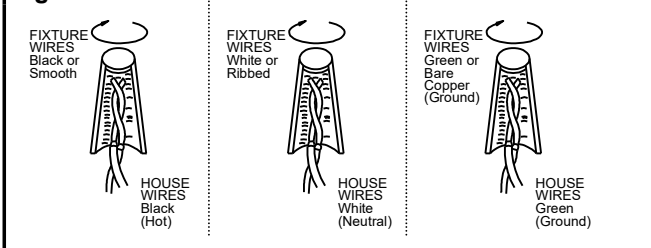

Your installation is now complete. Return power and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Replace swivel to be loop system (Fig.3)

1. Un thread nut (M), then remove lock washer (N), support cable (F), strip plate (D) and swivel (G) from canopy (E).
2. Attach one loop (X) to the other loop (S) by using quick link (Y).
3. Place strip plate (D) and loops (X) over canopy (E), then place support cable (F) and lock washer (N) onto protruding all thread at top of loop (X), securing with hex nut (M).

