

INSTALLATION INSTRUCTIONS

Item#6843-276 (New. 06/ 24/ 2014)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Position mounting plate (A) on the wall, and mark the location of the two plastic anchors (D). Pre-drill the holes for the plastic anchors (D) into the wall.
4. Attach the mounting plate (A) to the outlet box using mounting screws (B) (Size: #8-32N*L0.5"). The side of the mounting plate marked "GND" must face out.
5. Place the wood screws (C) through the holes of the mounting plate (A) and into the plastic anchors (D) to secure the mounting plate (A) to the wall.

CONNECTING THE WIRES (Fig. 2)


6. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw provided. After wires are connected, tuck them carefully into the ceiling junction box.

ASSEMBLING THE FIXTURE (Fig.1)

7. Place the back plate (G) and fixture body (E) over the mounting plate (A), and secure with the long screws (F).
8. Install the light bulbs (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!). (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
9. MIN 90°C supply conductors.

Your installation is now complete. Return power and test the fixture.

Fig. 1

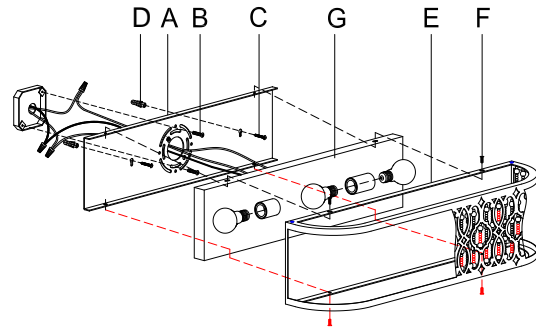

Set # A-021-488142

-Mounting Plate
-Crossbar screw
-mounting screws (2)

Fig. 2

