

# INSTALLATION INSTRUCTION FOR FIXTURE 6923

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT OFF THE POWER AT FUSE OR CIRCUIT BREAKER.**

### MOUNTING THE FIXTURE

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Attach the mounting plate (B) to the junction box (A) using the screw (C). The side of the mounting Plate marked "GND" must face out.

### Connecting the wires (Fig.2)

4. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secure. If your outlet box as a ground wire (green or copper), connect the fixtures ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided. After wires are connected, tuck them carefully inside the junction box.


### Finishing the installation (Fig. 1)

5. Align back plate (D) to the mounting plate (B) and secure with screws (E).
6. Place glass shade (F) over the socket (H) and secure with the socket ring (G). Repeat step 6 for each glass shade.
7. Install light bulb(s) (3 x 40W Xenon G9) in accordance with the fixtures specifications. (**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**)

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**Fig.2**

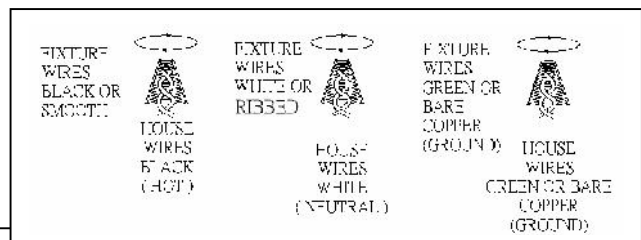

**Fig. 1**

