

# INSTALLATION INSTRUCTIONS FOR 72191

For Wall Sconce Fixture

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**

**AVERTISSEMENT ! COUPER LE COURANT AUNIVEAU DES FUSIBLES OU DU DISJONCTEUR**

## MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box. (avertissement! couper le courant au niveau des fusibles ou du disjoncteur) If necessary, remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Remove side screws (H) from frame (L) to separate the frame (L) from oval cover (N) , Remove the styrofoam and cardboard from inside of oval frame (L). Take care not to scratch the finish during assembly.
4. Attach circular strap (M) (Part#A-022) to the junction box with mounting screws (C)(Size:8-32\*1/2"L). The side of the circular strap (M) marked "GND" must face out.
5. Thread the two studs (A) (Size:8-32\*1"L) into the pre-drilled holes in the circular strap (M) spaced the same distance apart as the holes in the back plate (E).

## CONNECTING THE WIRES (Fig.2)

6. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw (B) provided. Tuck the wire connections neatly into the junction box.

## COMPLETING THE INSTALLATION (Fig.1)

7. Place the fixture back plate (E) over the studs (A), and secure with cap nuts (G).
8. To prevent moisture from entering the junction box and causing a short, use clear caulking (i.e. Indoor / Outdoor silicone sealant) to outline the outside of fixture back plate where it meets the wall leaving a space at bottom to allow moisture a means to escape (Fig.3)
9. Align oval frame (L) and handle (F) onto oval cover (N) and secure with side screws (H). (Note: Align the key hole (P) on the oval frame (L) with the screw (D). Install the 1\*100W A19 light bulb (J) (not included) in accordance with the fixture's specification: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!** ( NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE )

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

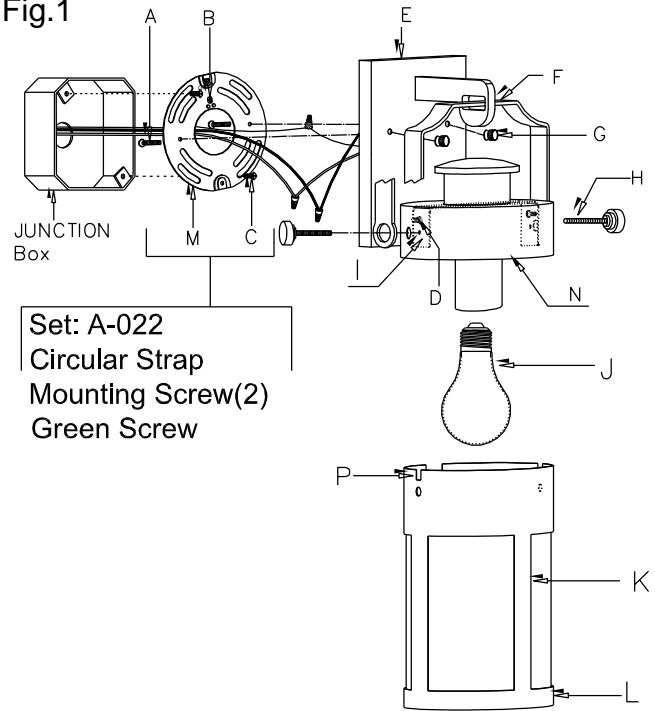


Fig .2

<b>FIXTURE WIRES</b> Black or Smooth		<b>FIXTURE WIRES</b> WHITE OR RIBBED		<b>FIXTURE WIRES</b> Green or Bare Copper (Ground)	
<b>HOUSE WIRES</b> Black (Hot)		<b>HOUSE WIRES</b> White (Neutral)		<b>HOUSE WIRES</b> Green or Bare Copper (Ground)	

Fig.3

