

# INSTALLATION INSTRUCTIONS

For Model 72231-143C (Rev. 06/10/2013)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Attach the circular strap (A) to the outlet box using mounting screws (B) (Size: #8-32N\*L0.5"). The side of the circular strap (A) marked "GND" must face out.
4. Install 2 studs (D) into the circular strap (A), spaced the same distance apart as the holes in the backplate (E).

### CONNECTING THE WIRES (Fig. 2)

5. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the ground wires from the fixture to it. Otherwise, connect the ground wire from the fixture directly to the circular strap and secure with the green screw provided. After wires are connected, tuck them carefully into the outlet box.

### COMPLETING THE INSTALLATION (Fig. 1)

6. Align back plate (E) over studs (D) and secure against the wall using the cap nuts (F).
7. Place the glass shade (J) over the socket of the fixture body (C), and secure with the socket ring (L).
8. Align decorative straps (H) to fixture body (C) and secure with ball screws (G).
9. Align bottom cover (K) to the glass shade (J) and decorative straps (H) and secure with ball screws (I).
10. To prevent moisture from entering the outlet box and causing a shortage, use clear caulking (i.e. Indoor/Outdoor silicone sealant) to outline the outside of fixture backplate where it meets the wall leaving a space at the bottom to allow moisture a means to escape (Fig. 3).
11. Install 1\*60W A19 bulb (not include) in accordance with the fixture's specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig.1

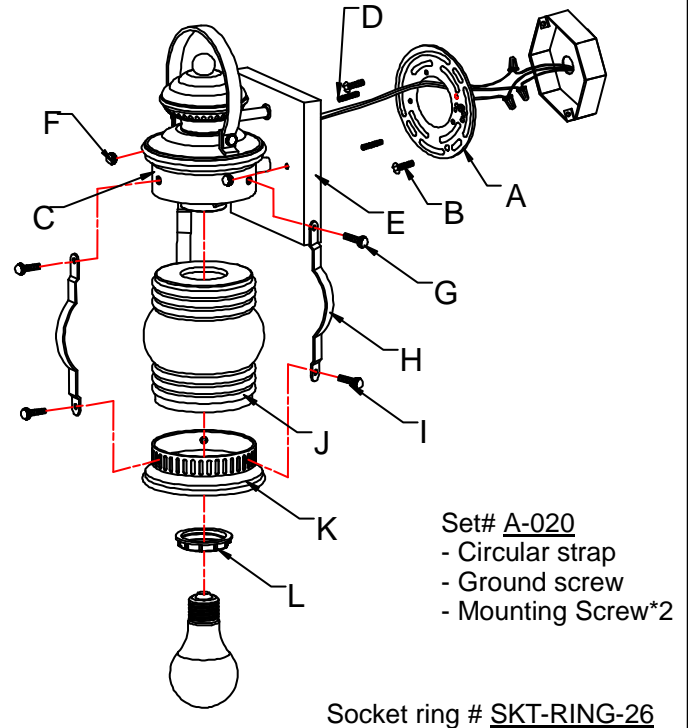


Fig.2

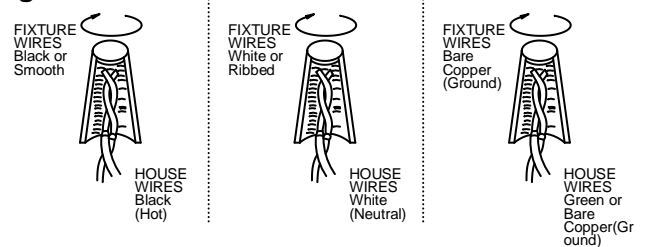


Fig.3

