

INSTALLATION INSTRUCTIONS

Item#72436-261

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.1)

1. Remove loop (A), ring (B), rubber washer (C), top cap (D), cup (E), and cover (F).
2. Remove nipple (G) and remove cover (H).
3. Insert back glass (J) and side glass (I) into the lamp body (P) and secure with clips (L).
4. Open door (M), insert front glass (N) and secure with clips (O).
5. Replace cover (H) over tube (K) and secure with nipple (G).
6. Replace cover (F), followed by cup (E), cap (D), rubber washer (C) and secure with ring (B) and loop (A).

POST THE FIXTURE (Fig. 2)

7. Shut off the power at the fuse box or circuit breaker box (avertissement! couper le courant au niveau des fusibles ou du disjoncteur) and remove the old fixture, including the mounting hardware.
8. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
9. Pull the black, white and ground wires out of post (S).

CONNECTING THE WIRES (Fig. 3)

10. While supporting the lantern, connect electrical wires as shown in (Fig 3). If your post has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, consult your electrician for proper grounding. After the wires are connected, tuck them carefully inside the post cup (Q). Align the lantern with post (S) and secure with screws (R). (Fig. 2)
11. Install the light bulbs (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!). (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power and test the fixture.

Note: Illustration (Fig.1) (Fig.2) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

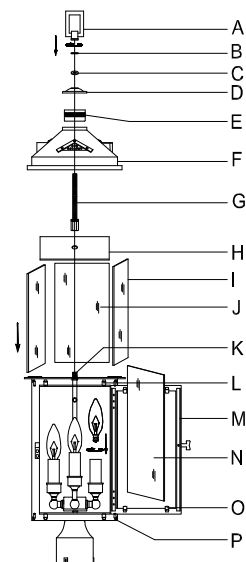


Fig. 2

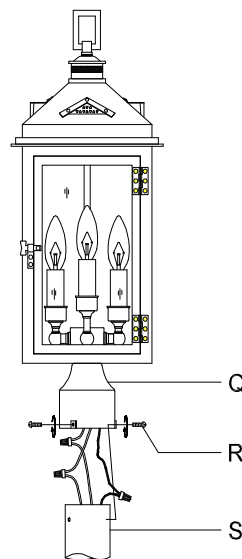


Fig. 3

