

INSTALLATION INSTRUCTIONS

Item#725-44/66A/84-L (New.2022/07/16)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Remove mounting plate (C) from canopy (E). Secure mounting plate (C) to outlet box (A) (Not included) with the mounting screws(D). Tighten until snug. Make sure the side of mounting plate (C) marked "GND" must face out.

WIRES CONNECTIONS (Fig.2)

4. Pull power supply wires out from outlet box (A). Connect black supply wire to black fixture wire using wire nuts (B). Connect white supply wire to white fixture wire using wire nuts (B). Connect fixture ground wire and supply ground wire together using wire nuts (B). If your outlet box does not have a ground wire, connect the fixture's ground wire directly to the mounting plate (C) using the green screw provided. Secure all wire nuts with electrical tape.

COMPLETING THE INSTALLATION (Fig.1)

5. Lift fixture body to outlet box (A). Line up holes on canopy (E) to mounting holes on mounting plate (C). Secure with screws (F). Tighten until snug.
6. Press the wire restraint up (G) on canopy (E) to adjust cable to desired height by pulling or pushing cable.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig. 1


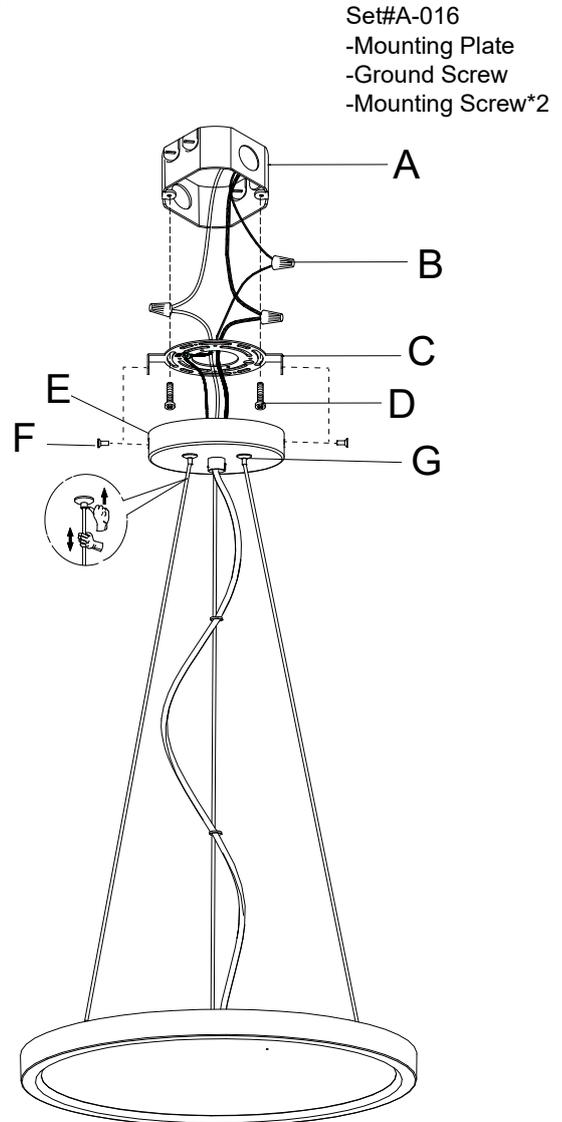


Fig. 2

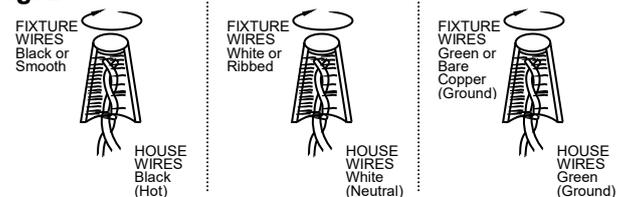

725-44/66A/84-L