

INSTALLATION INSTRUCTIONS

Model #72585

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker box and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Pull the black, white and ground wires out of post (A).

CONNECTING THE WIRES (Fig. 2)

4. Connect electrical wires while supporting the lantern. If your post has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, consult your electrician for proper grounding. (Fig.2)

COMPLETING THE INSTALLATION (Fig. 1)


5. Align the lantern (C) with post (A) and secure with screws (B). (Fig.1)
6. At this point, unscrew the screw (E), the roof (D), to install 5*40W/E12/B bulb (No bulb included) in accordance with the fixture specification

**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE
MAXIMALE!)**

7. Replace the roof (D), and secure with screws (E).

Your installation is now complete. Return power and test the fixture.

Fig. 1

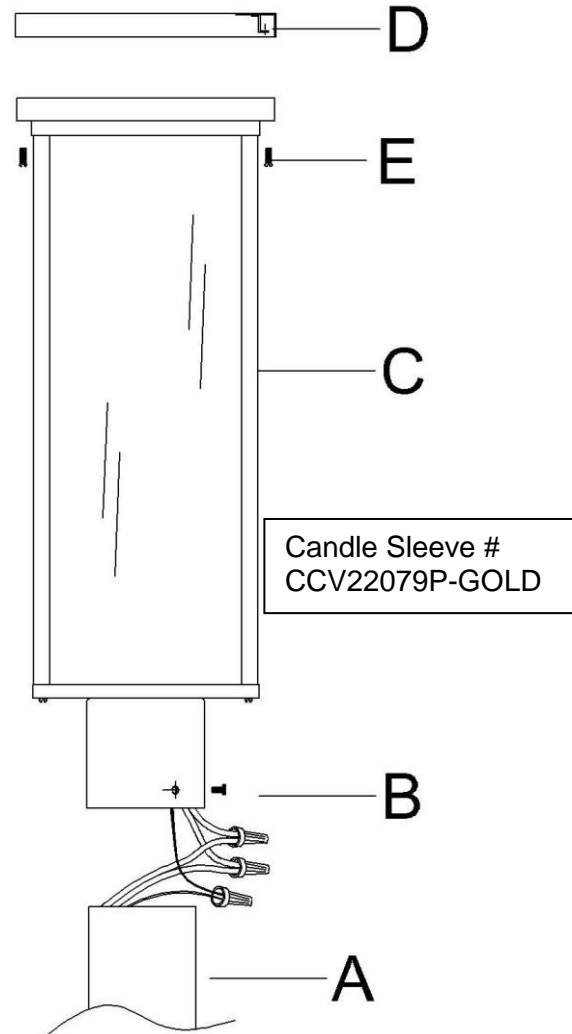

**“CAUTION-RISK OF FIRE CONSULT A
QUALIFIED ELECTRICIAN TO ENSURE
CORRECT BRANCH CIRCUIT CONDUCTOR”**

**ATTENTION – RISQUE D’INCENDIE, CONSULTER UN
ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE
LES CONDUCTEURS DE LA DÉRIVATION SONT
ADÉQUATS.**

