

# INSTALLATION INSTRUCTIONS

For Model 72676-32

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## HANGING THE FIXTURE (Fig. 1)

1. Shut off the power at the circuit breaker and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

## CONNECTING THE WIRES (Fig.2)

3. While supporting the fixture, connect the electrical wires as shown in figure 2. If your post has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, consult your electrician for proper grounding. After the wires are connected, tuck them carefully inside the post cup (A) (Not provided).

## COMPLETING THE INSTALLATION (Fig. 1)

4. Take off the cage (E) by loosening 2 Thumb screws (C).
5. Take off the glass (E), install the bulb (T10 Medium base, **not included**) in accordance with the fixture's specification.
6. Attach the glass (E) and Cage (F) back to the post (D), secure with two thumb screws (C). **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
7. Place the fixture onto post cup (A) (Not provided), and secure with the 3 mounting screws (B)

Your installation is now complete. Return power to the junction box and test the fixture

Fig. 1

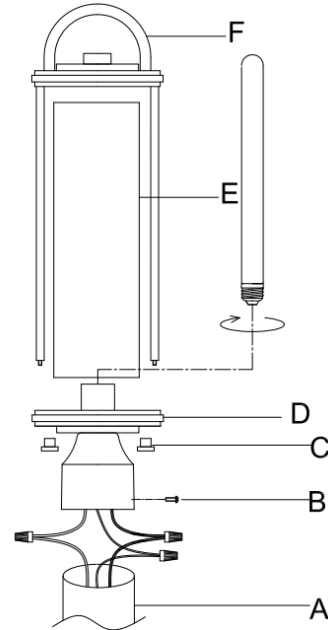


Fig. 2

