

INSTALLATION INSTRUCTIONS

Model# 73238-738

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Loosen screws (E) and separate top cover (F) from fixture frame (H).
4. Loosen nut (M) and remove thread (L) and finial (K) that are locked inside the top cover. (Fig.3)
5. Thread all thread (L) into finial (K) until snug. Slide gasket (O) over all thread (L) and insert assembly into top cover (F).
6. Place washer (N) over all thread (L) and tighten with nut (M).
7. Pull black, white and ground wires out of base cup (D).

CONNECTING THE WIRES (Fig. 2)

8. Connect electrical wires while supporting the lantern with wire connectors (B). If your post (A) (Not supplied) has a ground wire (green or bare copper), connect fixture ground wire to it. If not, consult your electrician for proper grounding.
9. After wires are connected, tuck them carefully inside base cup (D).
10. Align base cup (D) with post (A) and secure with mounting screws (C). (Fig.1)
11. Install (3) three candelabra base bulbs (I) up to 60 Watts, or CFL or LED equivalent (not included), in accordance with the fixture specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
12. Secure cover (F) to fixture frame (H) with screws (E) until tight.
13. To replace glass, shut off power at the fuse box. Loosen screws (E) to separate top cover (F) from fixture frame (H). Remove nut (G) from middle base (J), carefully pull-out middle base (J) and wires, then release the quick connection buckle (R) and remove middle base (J). Loosen glass clasp screws on fixture frame (H) to replace glass. Reinstalling the glass clasp and middle base (J), then secure top cover (F) to fixture frame (H), then re-light the fixture.



This fixture is ETL listed for wet location applications.

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig. 1

Candle Cover (3)
(Part#CCV21054P-861)

Fig.3

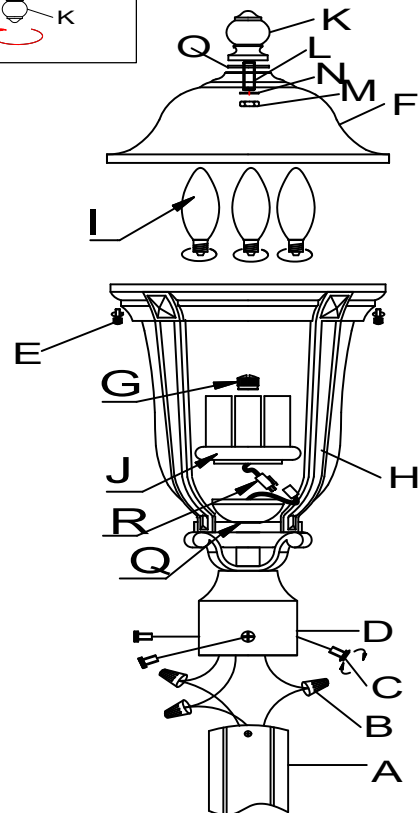

Glass Code# G8841

