

# INSTALLATION INSTRUCTIONS

Item#773 (New. 11/29/2011)

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker (avertissement! couper le courant au niveau des fusibles ou du disjoncteur) and remove the old fixture from the ceiling, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for the installation.
3. Place the glass shade (H), plastic washer (G) and metal washer (F) over the nipple located on the metal frame (D) and then secure them with nut (E).
4. Adjust the arms (C) to the proper position. Secure the arms (C) to the metal frame (D) and the top loop assembly (A) with ball nut (B).
5. Hang the crystal drops (I) on the edge of each metal leave on the arms (C).

## HANGING THE FIXTURE (Fig. 3)

6. Thread the nipple (C) into ceiling loop (F) until snug.
7. Thread the other end of nipple (C) with loop attached into crossbar (D) until snug.
8. Place lock washer (B) over the end of nipple protruding through crossbar and thread hex nut (A) onto nipple until tight.
9. Take this crossbar assembly and mount to ceiling junction box with junction box screw (E). Tighten screws securely with screwdriver. This side of crossbar marked with "GND" must face out.
10. Use a pair of chain pliers to open one end link of the chain and connect to the fixture loop (J), then close the link.
11. By measuring, determine correct number of links needed for desired hanging height. Using chain pliers, disconnect and discard remaining chain.
12. Lace the fixture wires through the chain.
13. Slip loop collar (H) over the chain, then do the same with canopy (G).
14. Open the other end link of the chain and connect to the ceiling loop (F), then close the link.
15. Feed the fixture wires through the ceiling loop (F) and nipple (C) and pull until tight.

## CONNECTING THE WIRES (See Fig.2)

16. Connect the electrical wire as shown in figure 3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, contact your local electrician for proper grounding. Tuck the wire connections neatly into the ceiling junction box.

## COMPLETING THE INSTALLATION (Fig. 1)

17. Raise the canopy (G) and loop collar (H) thread onto the ceiling loop (F).
18. Install the bulb(s) (not included) in accordance with the fixture's specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

**Note:** Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1

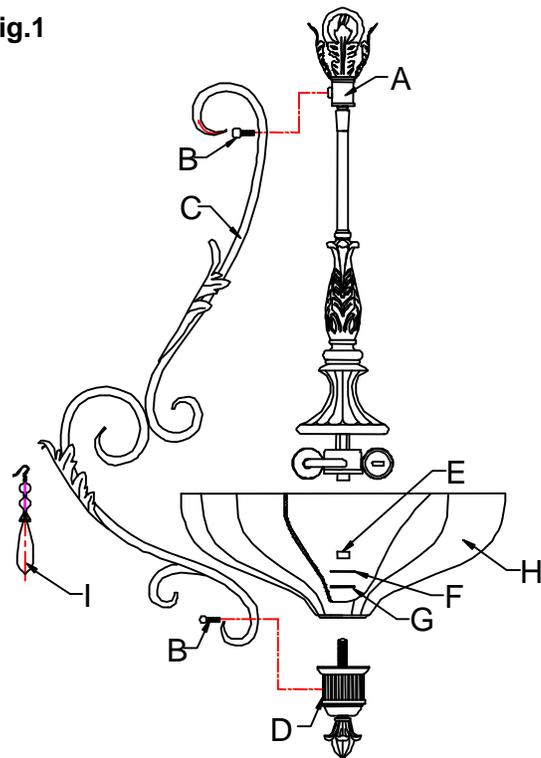


Fig.2


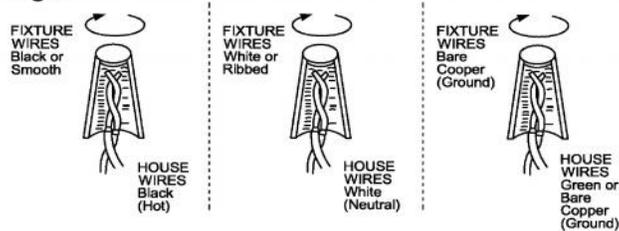


Fig.3



Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

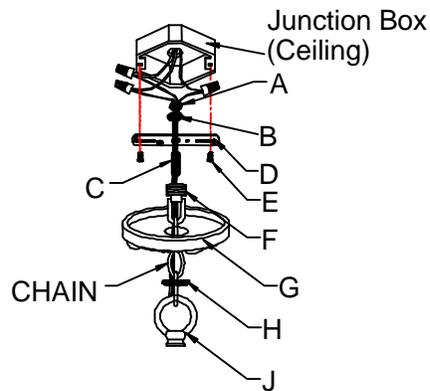

LA-2097E