

INSTALLATION INSTRUCTIONS

Model # 8268

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker box and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Determine the correct number of links needed for proper hanging height. Using a pair of proper chain pliers to disconnect and discard the remaining chain.
4. Open one end of the chain (E), and attach it to loop (L) and close the chain (E). Slip lock collar (K) followed by canopy (J) over the chain and allow them to carefully rest on the fixture top cover. Open the other end link of the chain (E) and lift the fixture to attach it to ceiling loop (D), close the chain.
5. Lace the fixture wires through the chain.
6. Thread nipple (I) into ceiling loop (D) until snug.
7. Thread other end of nipple (I) with loop (D) to cross bar (H) until snug. The length of nipple (I) into crossbar (H) may be adjusted if necessary.
8. Place lock washer (G) over the other end of nipple (I) protruding through the crossbar and secure with hex nut (F) onto nipple (I).
9. Feed the fixture wires through the loop (D), canopy (J) and nipple (I).
10. While supporting the fixture, attach the cross bar assembly to the outlet box (A) with outlet box screws (C).

CONNECTING THE WIRES (Fig. 2)

11. At this point, connect the electrical wires as shown in Fig. 2. making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), attach this wire and the bare copper wire from the fixture together. Otherwise, attach the bare copper fixture wire to the crossbar using the green screw (B) provided.

COMPLETING THE INSTALLATION (Fig. 1)

12. Tuck the wire connections neatly into the ceiling outlet box and then raise the canopy (J) to the ceiling and secure with lock collar (K) to chain loop (D)
13. At this point, install 3*60W/E12/B bulb (not included) in accordance with the fixture's specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RAITTING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig. 1


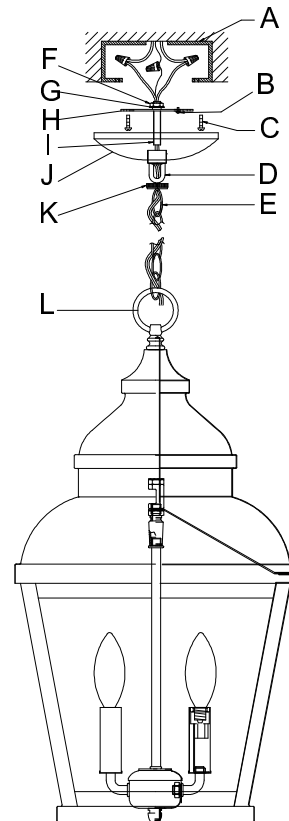


Fig. 2

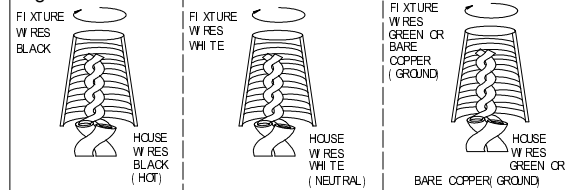

“CAUTION-RISK OF FIRE, CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR”

ATTENTION – RISQUE D’INCENDIE, CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

