

# INSTALLATION INSTRUCTIONS

For Model 8722-A615B/8723-A615B

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**


**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## MOUNTING THE BACKPLATE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. The circular strap (A) contains several pairs of threaded holes. Find the pair of holes that match the hole spacing in your fixture's backplate (D) and thread the two studs (C) into the circular strap (A) (You can adjust the length of the screws if necessary).
4. Attach the circular strap (A) to the outlet box with mounting screws (B). The side of the circular strap (A) marked "GND" must face out.

## CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw provided. Tuck the wire connections neatly into the junction box.

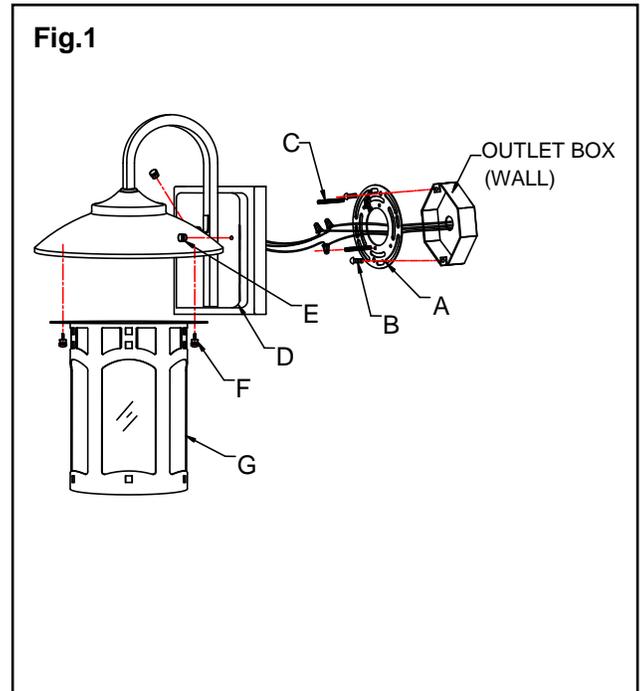

## MOUNTING THE FIXTURE (Fig.1)

6. Align the backplate (D) to the two studs (C). Secure the backplate (D) against the wall with cap nuts (E).
7. To prevent moisture from entering the outlet box and causing a short, use clear caulking (i.e. Indoor/Outdoor Silicone Sealant) to outline the outside of the backplate (D) where it meets the wall leaving a space at bottom to allow moisture escape. (Fig.3)
8. Install the bulb in accordance with the fixture's specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
9. Attach the Metal Frame (G) to the fixture's top tome with Screw (F).
10. For installing or replacing bulb at later date, install it through the bottom of the fixture.

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

