

# INSTALLATION INSTRUCTIONS

Item#9072-264 (NEW.2021/8/03)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Open door (I), insert front glass (J) into door (I), and secure with clips (H).
4. Insert side glass (K) into lamp body (G), and secure with clips (H).

### MOUNTING THE FIXTURE (Fig.2)

5. Thread screws (A) into pre-drilled holes in circular strap (C) spaced same distance apart as holes in back plate of fixture body and secure with hex nut (B). The length of screws (A) may be adjusted of necessary.
6. Attach circular strap (C) to junction box (not included) using mounting screws (D) (size: #8-32N\*L0.5"). The side of circular strap (C) marked "GND" and two convex points must face out.

### CONNECTING THE WIRES (Fig. 3)

7. Connect the fixture wires as shown in Fig.3, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to circular strap (C) using the green screw provided.
8. Tuck wire connectors neatly into the junction box.

### FINISHING THE INSTALLATION (Fig. 2 & Fig.4)

9. Align back plate (E) onto screws (A) and secure with cap nuts (F) and rubber washers provided.
10. To prevent moisture from entering the junction box and causing a shortage, use clear caulking (i.e. Indoor/Outdoor silicone sealant) to outline the outside of fixture back plate where it meets the wall leaving a space at the bottom to allow moisture a means to escape. (Fig. 4)
11. Install (2) two candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. **—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power and test the fixture.

**Note:** Illustration (Fig.1) (Fig.2) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1


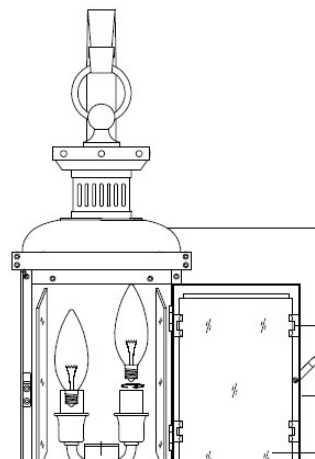


Fig. 2

Set# A-020  
- Circular Strap  
- Ground Screw  
- Mounting Screw

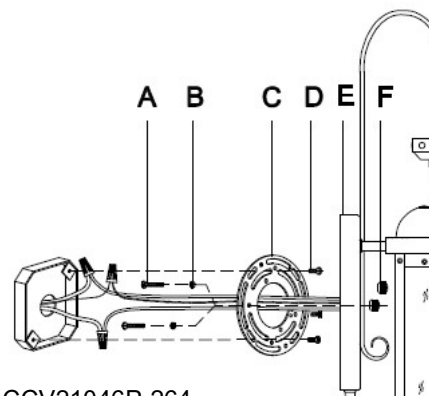

Candle cover# CCV21046P-264

Fig. 3


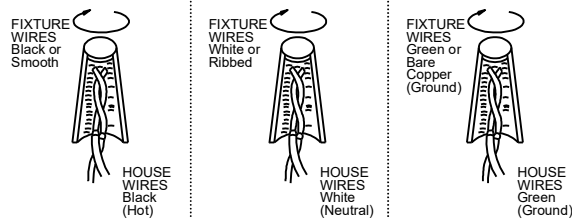


Fig. 4



LA-3440E

american  
lighting

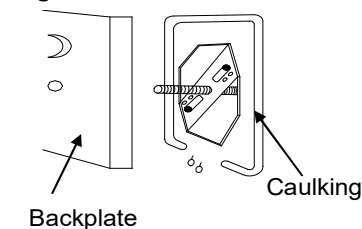