

INSTALLATION INSTRUCTIONS

For Model 971 (08/14/2012)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE BACKPLATE (Fig.1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Attach the crossbar (A) to the outlet box using two outlet box screws (B). The side of the Crossbar marked "GND" must face out.
4. Thread the nipple (C) part way into the center hole of the crossbar.

CONNECTING THE WIRES (Fig. 2)

1. At this point, connect the electrical wires as shown in Fig. 3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided. After wires are connected, tuck them carefully inside the junction box.

MOUNTING THE FIXTURE AND SHADE (Fig. 1)

1. Place the backplate (F) onto nipple (C) and secure with knurled cap (D).
2. Install glass shade (E) into the fixture body.
3. Install light bulbs in accordance with fixtures specifications, **DO NOT EXCEED MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1


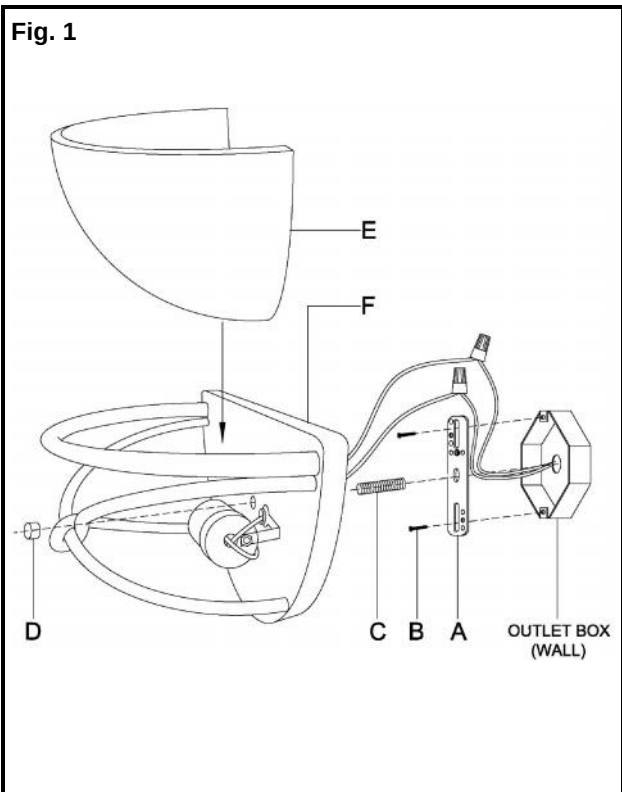


Fig. 2

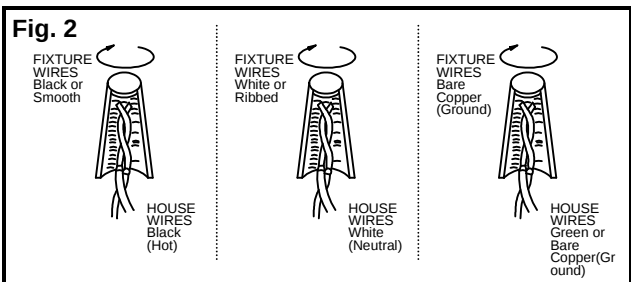

american
lighting
association

MIN 75°C SUPPLY CONDUCTORS

LA-2227E