

INSTALLATION INSTRUCTIONS

For Model # GKMP01-084&467

(Rev. 05/10/2012)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the mounting hardware.

CONNECTING THE WIRES (Fig. 2)

3. Attach the Circular Strap (E) to the Outlet box in the ceiling with two screws (B). The side of the Circular Strap marked "GND" must face out.
4. Tear the paper off the twin adhesive, then stick Transformer (C) into the Outlet Box, make sure it be stuck tightly.
5. At this point, connect the electrical wire as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures Ground Wire to it. Otherwise, connect the fixture Ground Wire directly to the crossbar using the Green Screw provided.
6. Place the Canopy (A) over the Circular Strap (E). Adjust the Canopy (A) and let the Studs (D) slide into the slot of Canopy (A). Tighten the Studs (D).

Your installation is now complete. Return power to the junction box and test the fixture.

GKMP01-084/467 Offer many different types of fixtures. Pendants, flexible, and fixture are available. Choose the style and type that best fit.

Caution: Maintain at least 4 inch from lamp shade to ceiling or any obstruction. (Fig.3)

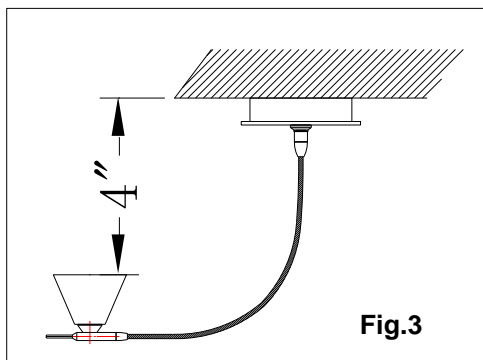


Fig. 1


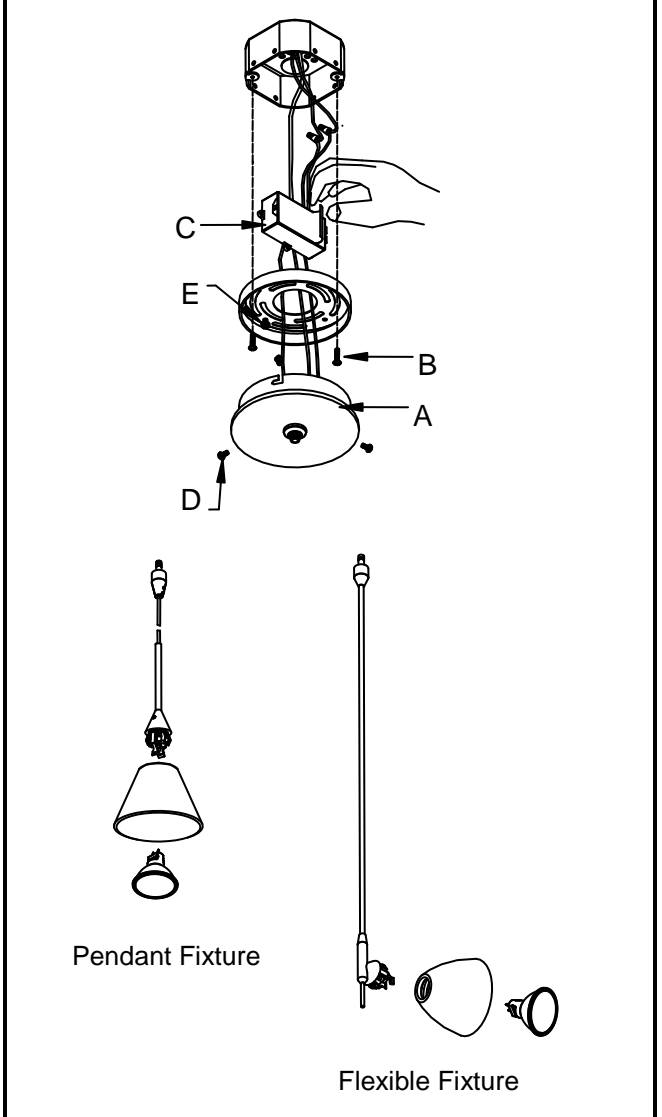


Fig. 2



IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

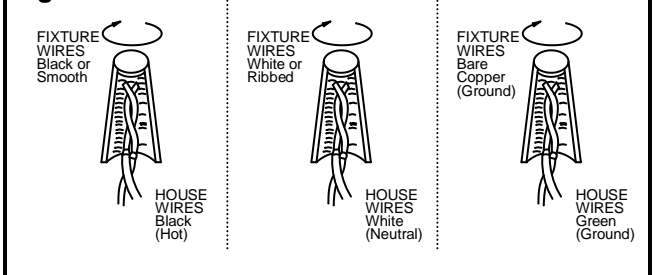