

INSTALLATION INSTRUCTIONS

Item#N1761-752

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION THE FIXTURE

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Loosen set screw (I) on coupling (H), to adjust the position of wire (E) to the desired length.
4. Loosen coupling (H) and hex nut (D) to separate canopy (B) from crossbar assembly.
5. Attach crossbar assembly to junction box (Not included) using junction box screws (C). The side of crossbar (A) marked "GND" must face out. Note: The all thread (G) into crossbar (A) may be adjusted when installing, if necessary, tighten with hex nut (Y).

CONNECTING THE WIRES

6. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors (F) are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to crossbar (A) using green screw provided.

COMPLETING THE INSTALLATION

7. Attach canopy (B) to all thread (G) and tighten canopy (B) with hex nut (D) and coupling (H).
8. Re-install set screw (I) to coupling (H) and secure wire (E).
9. Install (1) one medium base bulb (J) up to 25 watts or CFL or LED equivalent (not included) in accordance with the fixture's specification. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

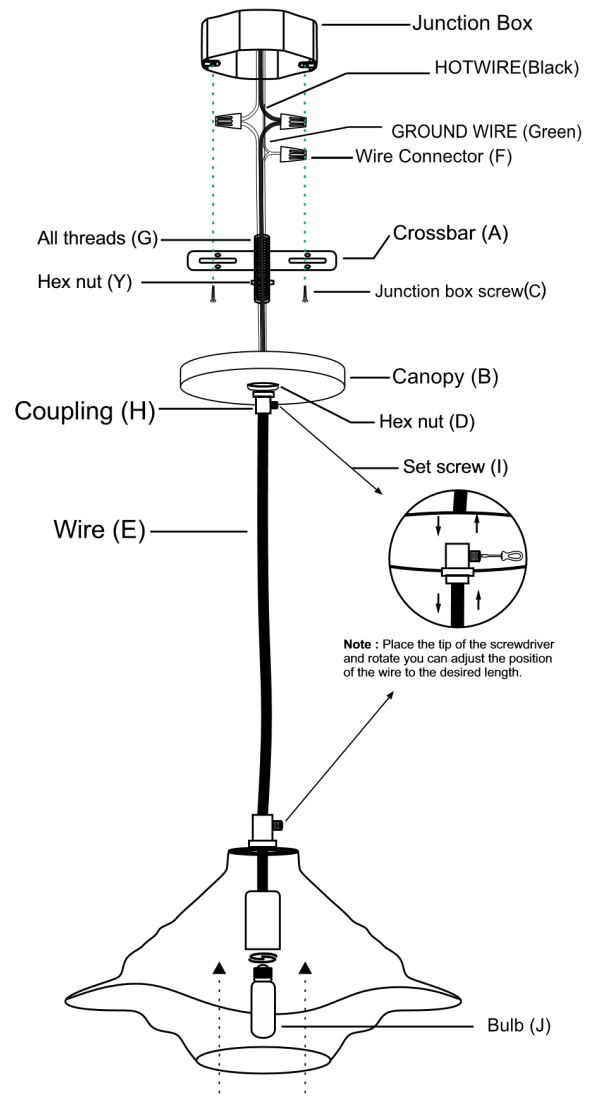


FIG.2

