INSTALLATION INSTRUCTIONS

Item# N1869-760

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER. VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

- 1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
- Carefully unpack your new fixture and lay out all the parts in a clean area. Ensure not to misplace any small parts necessary for installation.
- 3. Your fixture is supplied with two types of chain, the one set is for main canopy and the other 4x sets are for sub-canopy assembly.
- 4. Please note: One set chain is fed with wire that laced on.
- Take the chain (ch) with wire and feed wires through holes of the loop (1) and sub canopy (M).
- 6. Hook the 4x sets of chain (ch) to both sub canopy assembly loop (1) and fixture assembly loop (2).

HANGING THE FIXTURE (Fig. 2)

- 7. Thread all thread (D) into crossbar. Note: The length of all thread (D) into crossbar maybe adjusted if necessary.
- 8. Use lock washer (B) and hex nut (E) to secure all thread (D) to crossbar (A).
- Take crossbar assembly and mount to junction box (JB) "not provided" with 8-32 mounting screws. The side of crossbar (A) marked with "GND" must be faced out. Note: 4x quick links are provided.
- 10. Determine the desired hanging height and discard the excess chain (K).
- 11. Open quick link (J) and connect to loop (F), chain (K) and loop (L), then thread the quick link (J) closed to secure.
- 12. The support cable is provided to support the weight of the fixture. Align fixture to crossbar (A) and attach hook (HK) to a slot located on crossbar (A). Allow cable to support weight of fixture while wiring.

CONNECTING THE WIRE (Fig. 3)

- 13. In this step, you may need assistance for wiring connection as the the fixture maybe slightly heavy.
- 14. Make an electrical wire connection as shown in Fig. 3, making sure that all the wire connectors are secured. If your junction box has a ground wire (green,or bare copper), connect fixture's ground wire to it. Otherwise connect fixture ground wire directly to crossbar (A) using green screw provided.
- 15. To mount the fixture to the ceiling, slip the threaded nipple (D) through the mounting holes (H) at the canopy (G) then thread the cap nuts (I) at the end of all thread (D) and tighten.


FINISHING THE FIXTURE (Fig. 1).


 Install the 14x E12 base light bulbs (LB) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.


DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

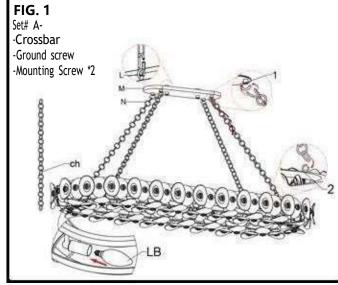

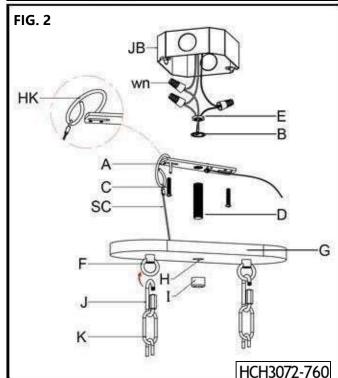

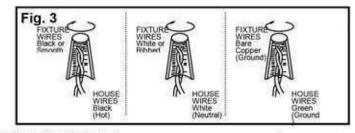



Notice: It is important to use proper chain pliers (not included)
To OPEN and CLOSE the chain included with this fixture. Do not
open them with other tools that may twist or stress the chain links.
It is important to use proper chain pliers like the ones shown in the
diagram.

