

INSTALLATION INSTRUCTIONS

Item# N1902-785/ N1902-792

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

MOUNTING THE FIXTURE

3. Remove mounting plate (A) from back plate (C) by removing screws (D) located on side of back plate (C). see fig. 1.
4. To begin installation, first attach mounting plate (A) to junction box (JB) **"not provided"** by using 8-32 screws (B). Make sure threaded holes are on the side when installing mounting plate. Make sure plate is straight when placing a level across the top. Adjust plate and tighten screws to secure mounting plate. The side of mounting plate (A) with **"GND"** marked on it and two convex points must face out.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wire as shown in Fig. 2, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixtures ground wire to it. Otherwise connect fixture ground wire directly to mounting plate (A) using green screw provided.
6. Tuck wire connections neatly into junction box (JB).

FINISHING THE FIXTURE

7. To mount the fixture to wall. Slip back plate (C) over mounting plate (A) and align holes at side of back plate (C) with threaded holes on side of mounting plate (A).
8. Secure back plate to mounting plate (A) using screws (D)
9. Thread all the pedals (F), (G), (H), onto frame (fr). Follow diagram as shown in Fig.1 for pedals configuration and location.
10. Install 2x E12 base light bulbs (LB) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

MIN OF 75°C SUPPLY OF CONDUCTORS
LES FIL D' ALIMENTATION 75°C MIN.

Fig.1

Set# A-020
-Mounting
-Ground screw
-Mounting Screw *2

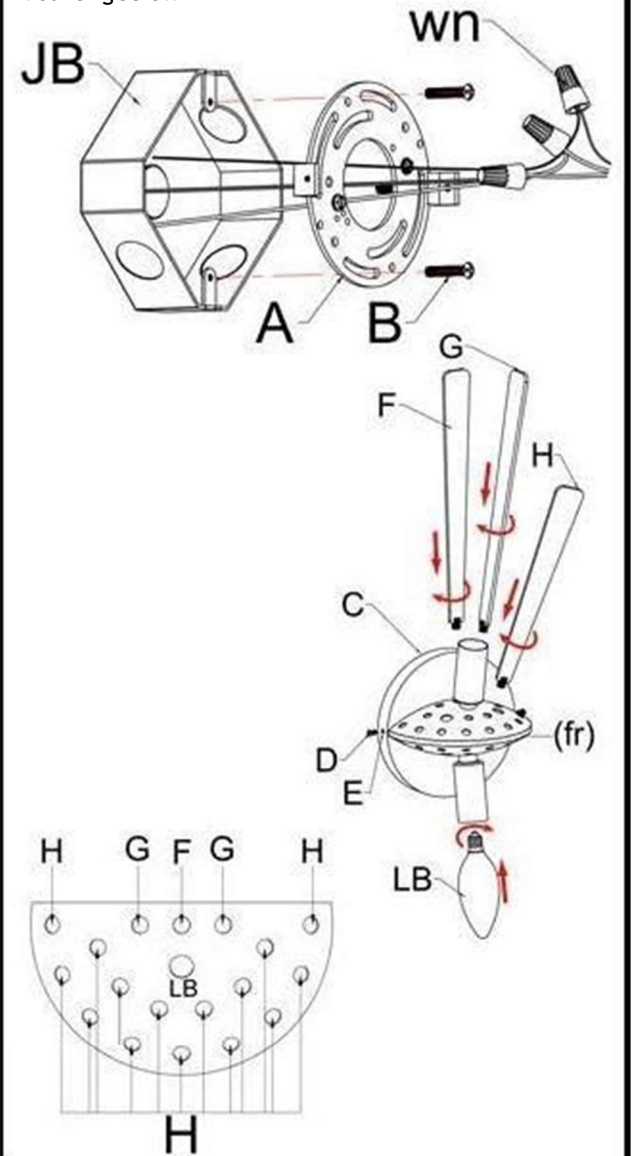


Fig. 2

