

INSTALLATION INSTRUCTIONS

Item# N1905-785 / N1905-792

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Your fixture is supplied with 2 sizes of stem, 2x 6" and 3x 12".
4. To begin assembly of your fixture, first thread the stem (L2) onto threaded tube (1). Determine the desired hanging height and thread rods (K1, K2, K3, & L1) with the fixture loop (J) and tighten.
5. Carefully pass wires through each rod during assembly.

HANGING THE FIXTURE (Fig. 2)

6. Thread all thread (D) into ceiling loop (F) until snug.
7. Thread the other end of all thread (D) into crossbar. Note: The length of the all thread (D) into crossbar maybe adjusted if necessary.
8. Use lock washer (B) and hex nut (E) to secure all thread (D) to crossbar (A).
9. Take crossbar assembly and mount to junction box (JB) "not provided" with 8-32 mounting screws. The side of crossbar (A) marked with "GND" must be face out. Note: 1x quick link is provided.
10. Open quick link (G) and connect to loops (F/J). Then close quick link.
11. Slip canopy (H) and collar ring (I) over quick link on fixture body.
12. Feed fixture wires through ceiling loop (F), crossbar assembly, and all thread (D).

CONNECTING THE WIRE (Fig. 3)

13. Connect the electrical wire as shown in Fig. 3, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixture's ground wire to it. Otherwise connect fixture's ground wire directly to crossbar (A) using green screw provided.
14. Tuck wire connections neatly into junction box (JB).
15. Raise canopy (H) over ceiling loop (F) and secure with collar ring (I).

FINISHING THE FIXTURE (Fig. 1)

16. Put rubber washer (RW) and thread all the pedals (M) onto frame (2).
17. Install 12x E12 base light bulbs (LB) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!

(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

FIG. 1

Set# A

-Crossbar

-Ground Screw

-Mounting Screw *2

wire

ROD #

W35-1-785 (K1,K2,K3)

W35-H-785 (L1,L2)

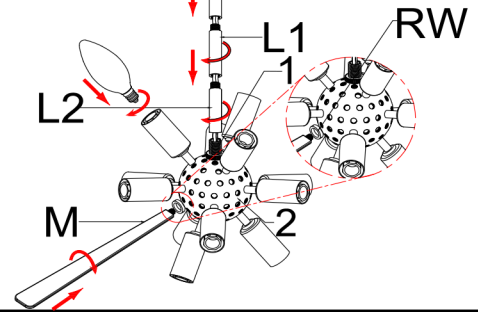


FIG. 2

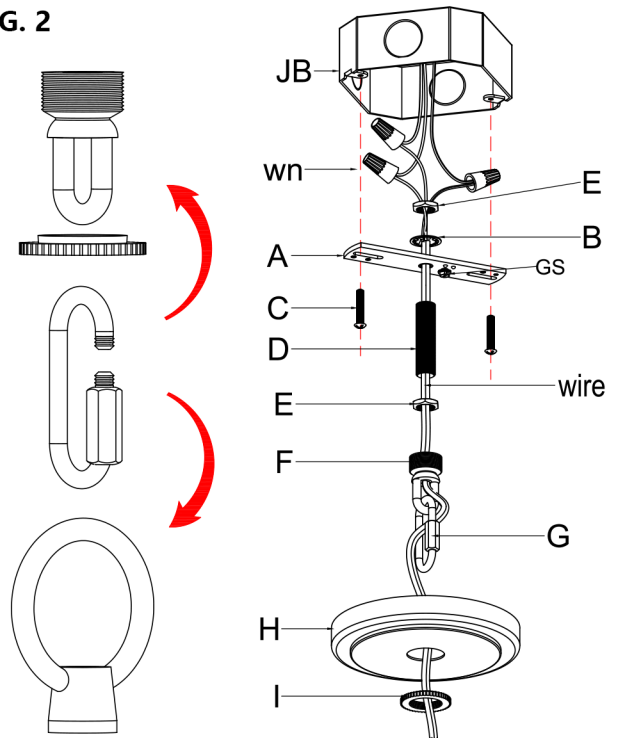


Fig. 3

FIXTURE WIRES
Black or
Smooth

FIXTURE WIRES
White or
Ribbed

FIXTURE WIRES
Bare
Copper
(Ground)

HOUSE WIRES
Black
(Hot)

HOUSE WIRES
White
(Neutral)

HOUSE WIRES
Green
(Ground)



american
lighting
association