

INSTALLATION INSTRUCTIONS

Item# N1936-760

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Your fixture is supplied with 2 sizes of stem, 1x 6" and 3x 12".
4. To begin assembly of your fixture, determine the desired hanging height and thread rods (K, & L) with fixture loop.
5. Slip stem assembly along with wire and thread onto threaded tube (1) and tighten.

HANGING THE FIXTURE (Fig. 2)

6. Thread all thread (D) into ceiling loop (F) until snug.
7. Thread other end of all thread (D) into crossbar. Note: The length of all thread (D) into crossbar may be adjusted if necessary.
8. Use lock washer (B) and hex nut (E) to secure all thread (D) to crossbar (A).
9. Take crossbar assembly and mount to junction box (JB) **"not provided"** with 8-32 mounting screws. The side of crossbar (A) marked with "GND" must be face out. Note: 1x quick link (G) are provided.
10. Open quick link (G) and connect to loops (F/J). Then close the quick link.
11. Slip canopy (H) and collar ring (I) over quick link (G) and allow them to rest on fixtures loop (J).
12. Feed fixture wires through ceiling loop (F), crossbar assembly, and all thread (D).

CONNECTING THE WIRE (Fig. 3)

13. Connect the electrical wire as shown in Fig. 3, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixtures ground wire to it. Otherwise connect fixture ground wire directly to crossbar (A) using green screw provided.
14. Tuck wire connections neatly into junction box (JB).
15. Raise canopy (H) over ceiling loop (G) and secure with collar ring (I).

FINISHING THE FIXTURE (Fig. 1)

16. Install 6x E12 base light bulbs (LB) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.

FIG. 1

Set# A-
-Crossbar
-Ground screw
-Mounting Screw *2

ROD #
W30-1-760*3 (K1,K2,K3)
W30-H-760*1 (L)



FIG. 2


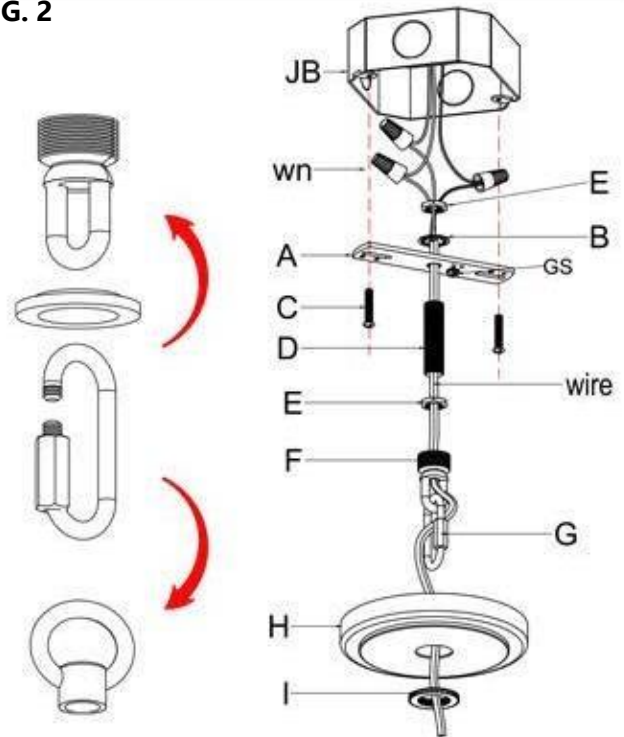


Fig. 3

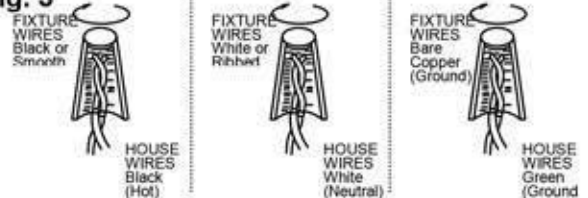

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.