

# INSTALLATION INSTRUCTIONS

For Model# N2721-258

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## ASSEMBLING THE FIXTURE (Fig.1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
3. Position the fixture body on the wall and mark the location of the drywall anchors (A). Pre-drill the holes for the drywall anchors (A) and insert them into the wall. The screw (G) to fix cross bar (B).
4. Attach the mounting plate (K) to the outlet box (L) (not included) using the mounting screws (I) (SIZE: #8-32\*5/8"L). The side of the mounting plate (K) marked "GND" must face out.

## CONNECTING THE WIRES (Fig. 2)

5. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it and secure with the wire connectors, otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided. After wires are connected, tuck them carefully into the outlet box.


## COMPLETING THE INSTALLATION (Fig. 1)

6. Place the fixture body onto the mounting plate (K) and secure with the screws (J) (Size: #8-32\*1/2"L). Then secure the bottom part of the fixture body onto the drywall anchors (A) using the screws (G).
7. Place the top frame (E) onto the socket (H) allowing the two screws (B) to protrude through the slotted holes and secure with the finials (F); then secure with the socket ring #SKT-RING-26 (C)
8. Slide the glass (D) onto the top frame (E).
9. Install the light bulb(s) (not included) in accordance with the fixture's specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)** **(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

**FIG.1**

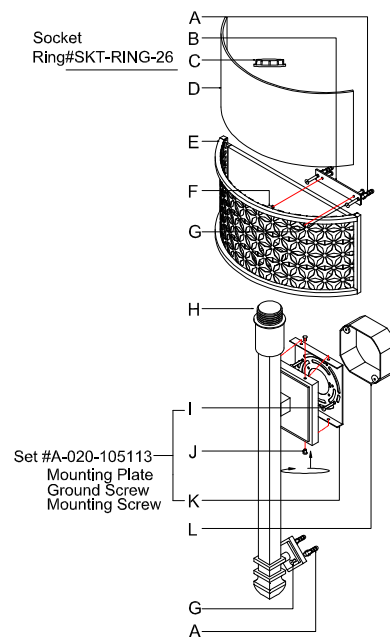

**Fig. 2**

