

# INSTALLATION INSTRUCTIONS

Item#N5361-XXX (New. 06/06/2024)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### MOUNTING THE LUMINAIRE, MINI PENDANT VERSION (Fig. 1).

#### ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Determine the desired hanging height and if necessary, cut the cord leaving an additional 5" to allow for electrical connection.
4. Install the strain relief bushing (C) by removing screw (E) from bushing (D) and pushing the cord through the center of bushing (D) and strain relief (C) until about 5" of cord is exposed.
5. Secure the cord into strain relief (C) and bushing (D) by tightening screw (E).
6. Carefully cut and remove approximately 4" of the outer sheathing from the cord and strip 1/2" of the wire ends bare to expose the copper strands.
7. Attach mounting plate (A) to outlet box (Not included) with mounting screws (B) (size: #8-32N\*L0.5"). The side of the mounting plate marked "GND" with two convex points must face out.

#### CONNECTING THE WIRES (Fig. 3)

8. Connect the electrical wires as shown in Fig.3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate using green screw provided.
9. Tuck wire connectors neatly into the outlet box.

#### COMPLETING THE INSTALLATION (Fig. 1)

10. Place canopy (G) over mounting plate (A) and secure with screws (F)
11. Install (1) one candelabra base bulb (I) up to 60 watts each or CFL or LED equivalent (Not included) in accordance with the fixture specification. **—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
12. Twist glass shade (J) to socket (H) until snug. Do not over tighten.
13. To straighten the cord, please use a blow dryer (Not included) if necessary.

Your installation is now complete. Return power to the outlet box and test the fixture.

**Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be**

Fig. 1

Set# A-021-118DL  
-Mounting Screw \*2  
-Ground Screw  
-Mounting Plate


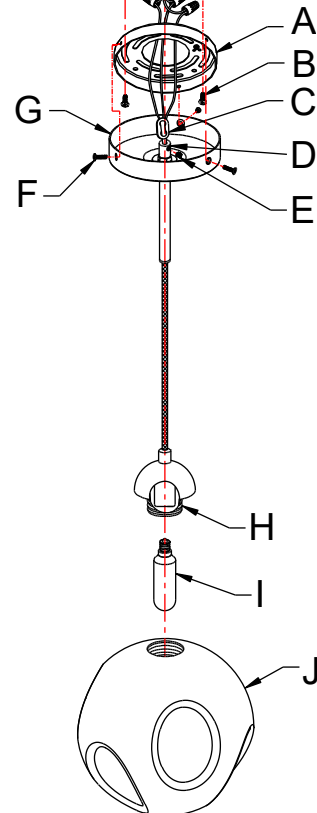


Fig. 3

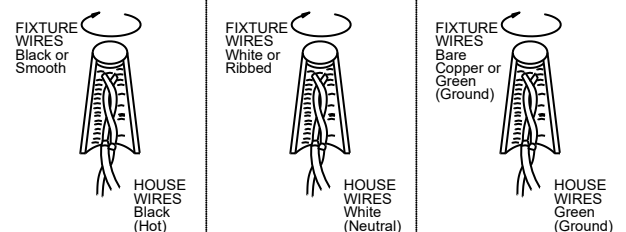

# INSTALLATION INSTRUCTIONS

Item# N5361-XXX (New. 06/06/2024)

**READ AND SAVE THESE INSTRUCTIONS**

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## MOUNTING THE FIXTURE, SCONCE VERSION (Fig. 2)

### ASSEMBLING THE FIXTURE (Fig. 2)

1. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Determine the desired hanging height and if necessary, cut the cord leaving an additional 5" to allow for electrical connection.
4. Install the strain relief bushing (C) by removing screw (E) from bushing (D) and pushing the cord through the center of bushing (D) and strain relief (C) until about 5" of the cord is exposed.
5. Secure the cord into strain relief (C) and bushing (D) by tightening screw (E).
6. Carefully cut and remove approximately 4" of the outer sheathing from the cord and strip 1/2" of the wire ends bare to expose the copper strands.
7. Attach mounting plate (A) to outlet box (Not included) with mounting screws (B) (size: #8-32N\*L0.5"). The side of the mounting plate marked "GND" with two convex points must face out.

### CONNECTING THE WIRES (Fig. 3)

8. Connect the electrical wires as shown in Fig.3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate using green screw provided.

### COMPLETING THE INSTALLATION (Fig. 2)


9. Place canopy (G) over mounting plate (A) and secure with screws (F)
10. Install (1) one candelabra base bulb (I) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. **—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
14. Twist glass shade (J) to socket (H) until snug. Do not over tighten.
15. To straighten the cord, please use a blow dryer (Not included) if necessary.

Your installation is now complete. Return power to the outlet box and test the fixture.


**Note: Illustration (Fig.2) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**Fig. 2**

Set# A-021-118DL  
-Mounting Screw \*2  
-Ground Screw  
-Mounting Plate

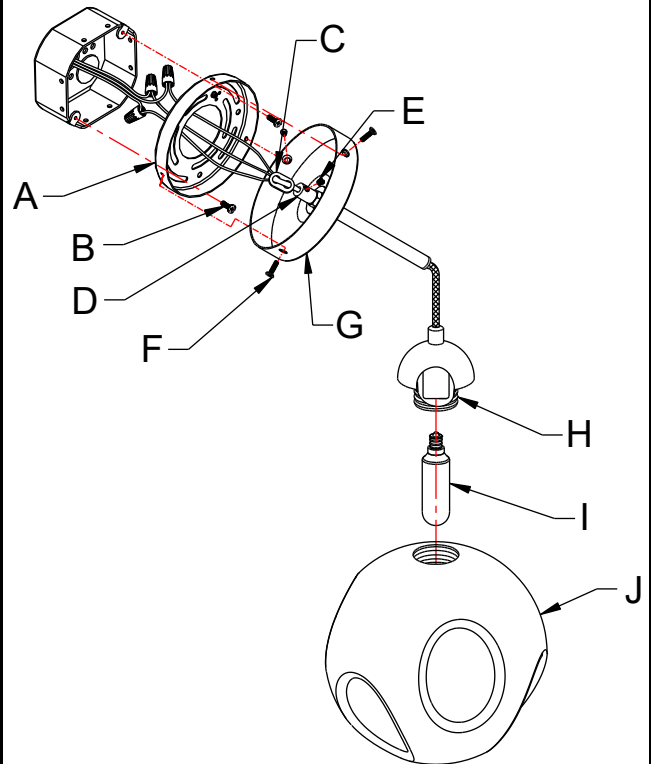

**Fig. 3**

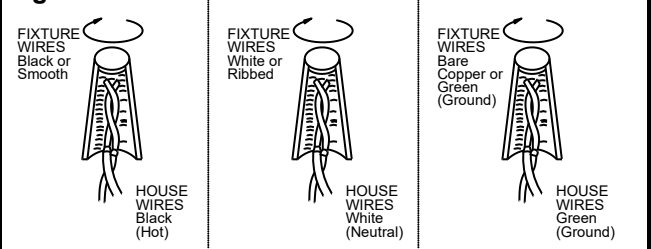

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

