

INSTALLATION INSTRUCTION FOR N5621-732

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

READ AND SAVE THESE INSTRUCTIONS

PREPARATION

1. Shut off the power at the circuit breaker box and, if necessary, remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

MOUNTING THE FIXTURE (Fig.1)

3. Position the mounting plate (B) onto the outlet box (not included) and secure it using the outlet box screws (C). Ensure that the side of the mounting plate (B) marked 'GND' is facing outward.

CONNECTING THE WIRES (Fig. 2)

4. Connect the electrical wires as shown in Fig. 2, make sure all wire connectors are secured. If your junction box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate using the green screw provided.
5. Tuck wire connections neatly inside the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

6. Attach the backplate (D) to the mounting screws (A) and secure with knurled balls (E).
7. Install (2) two candelabra base bulbs (F) up to 40 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.

(DO NOT EXCEED THE SPECIFIED WATTAGE!)
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

8. Slide the frame (H) to backplate (D) from top to bottom according to Fig. 1 illustration.

Your installation is now complete. Return the power to the junction box and test the fixture.

Fig.1

Set#N5621-732

- Mounting plate
- Ground screw
- Junction box screws*2
- Knurled ball screws*2


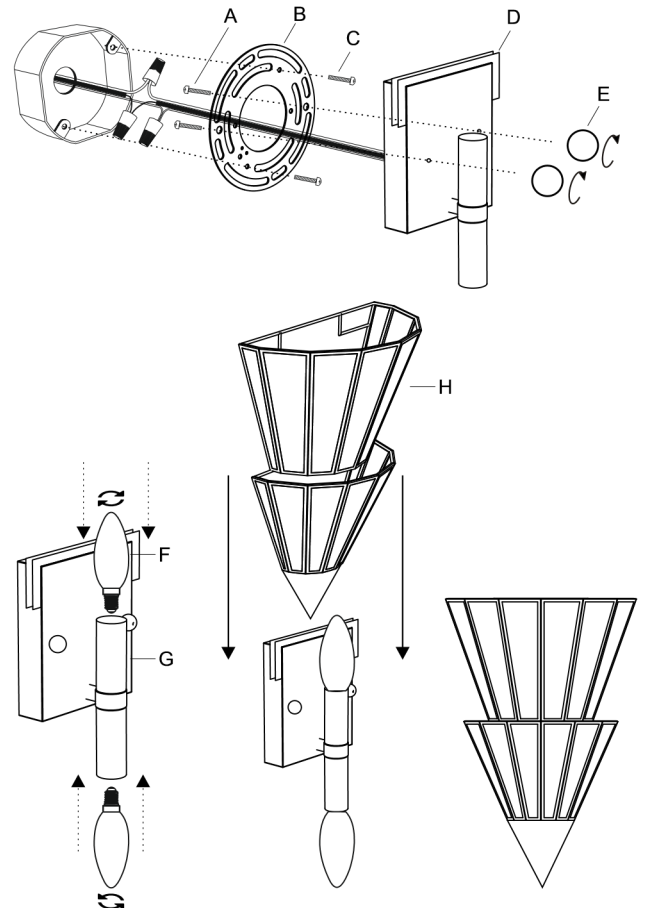


Fig.2



Min 90° supply conductors

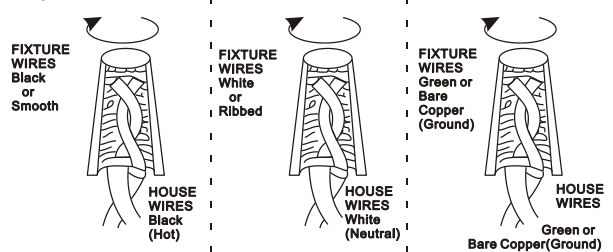