

# INSTALLATION INSTRUCTIONS

Item#N5625-732

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**VERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Position mounting plate (B) on the ceiling and mark location of the three mounting holes. Pre-drill the holes for plastic anchors (A). Insert plastic anchors (A) into ceiling.
4. Attach mounting plate (B) to junction box (Not included) using outlet box screws (C) and wood screws (E). The side of mounting plate marked "GND" must face out.
5. Determine the desired hanging height and use a pair of proper chain pliers to remove and discard excess chain.
6. Open quick link (H1) and attach it to fixture loop of center cover (J) and chain (G).
7. Pass the wire through the rod (K), then attach the rod (K) to the ring of part (N1) and center cover (J). You can adjust the fixture balance using the threaded height adjuster (L) to set the fixture in the desired position as shown in Fig.3.
8. The support cable (O) is provided to support the weight of the fixture while wiring. Align the fixture to canopy (F) and attach hook on the end of support cable into a slot located on junction box. Carefully allow support cable to support the weight of the fixture while wiring (Fig.1).
9. Carefully lace fixture wires through chain (G).

### CONNECTING THE WIRE (Fig. 2)

10. Connect the electrical wire as shown in Fig.2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate (B) using green screw provided.
11. Tuck wire connections neatly into the outlet box.

### HANGING THE FIXTURE (Fig. 1)

12. Attach canopy (F) to mounting plate (B) and secure firmly with the canopy screws (I).

### FINISHING THE FIXTURE (Fig.3)

13. Install (5) five candelabra base bulbs (M) up to 40 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture**



Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

Fig 1.


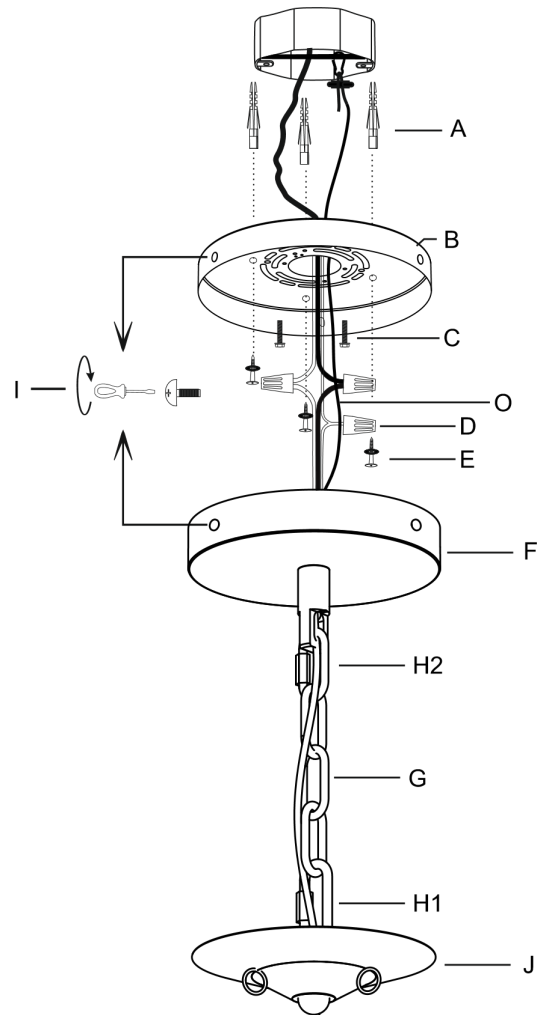


Fig. 2

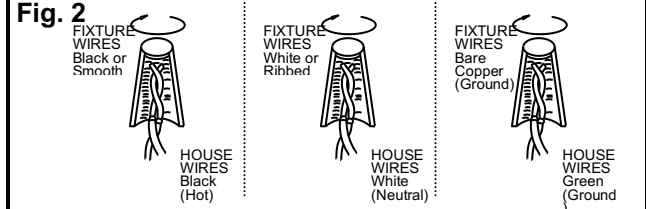

**ASSEMBLING THE FIXTURE (Fig. 3)**

14. Slide part (N2) to part (N1), then slide part (N3) to part (N2) as shown in Fig.3

**Your installation is now complete. Return power to the outlet box and test the fixture.**

