

INSTALLATION INSTRUCTIONS

Item#5626-732

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
ERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION THE FIXTURE

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Position mounting plate (C) on the ceiling and mark location of the four mounting holes. Pre-drill the holes for plastic anchors (B). Insert plastic anchors (B) into ceiling.
4. Attach mounting plate (C) to junction box (Not included) using junction box screws (D). The side of mounting plate marked "GND" must face out.
5. The support cable (P) is provided to support the weight of the fixture while wiring. Align the fixture to canopy (F) and attach hook on the end of support cable into a slot located on junction box. Carefully allow support cable to support the weight of the fixture while wiring (Fig.1).
6. Secure mounting plate (C) by inserting metal screws (D) through holes on mounting plate (C) into plastic anchors (B).
7. Carefully pass the wire (L) through threaded rods (J1 & J2), then fasten both rods into the fixture threads (K).
8. Determine desire hanging height and use a pair of proper chain pliers to remove and discard excess chain (H). Then attach quick link (I) to the end of chain and fixture loop.

CONNECTING THE WIRES

9. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors (E) are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (C) using the green screw provided.

COMPLETING THE INSTALLATION

10. Attach canopy (F) to the mounting plate (C) and secure it firmly using screws (G).
11. Install (6) six candelabra base bulbs (N) up to 40 watts or CFL or LED equivalent (not included) in accordance with the fixture's specification. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig 1.


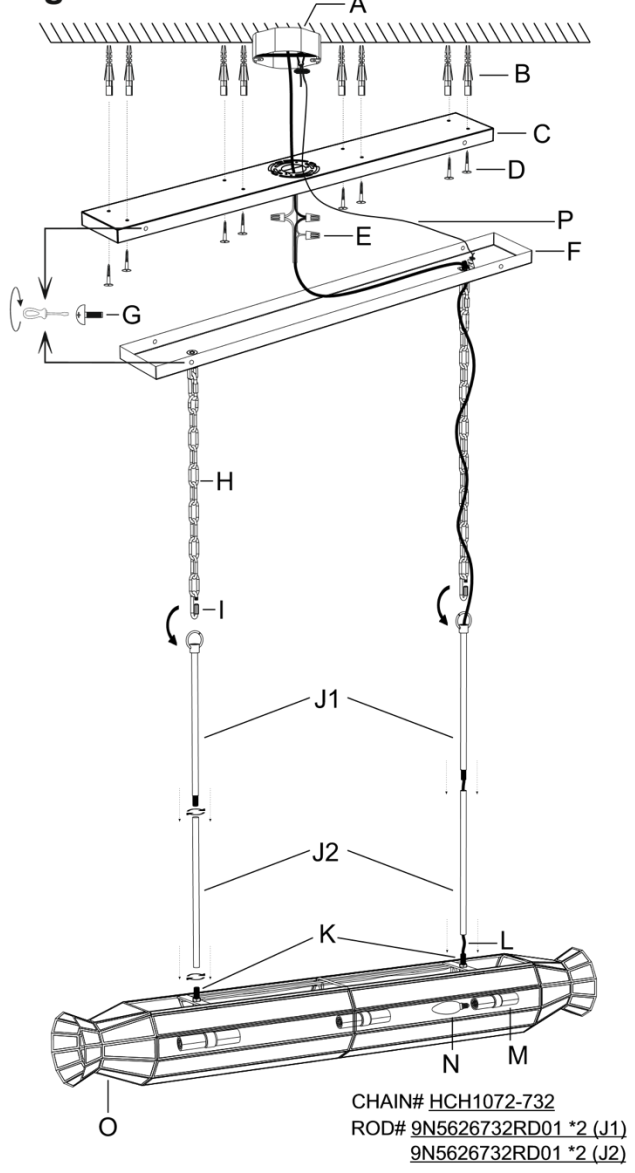


FIG.2



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

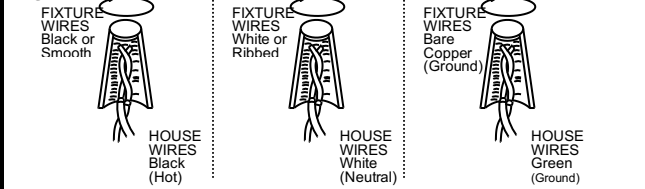

american
lighting
association