

INSTALLATION INSTRUCTIONS

For Model # N6107 (Rev. 11/24/2012)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Insert the Glass Diffuser (C) into the Metal Frame (D).
3. Attach the Metal Frame (D) to the Light Assembly and secure with Screws (A and B) as shown in Fig. 1.

HANGING THE FIXTURE (Fig. 2)

Shut off power at the circuit breaker and remove old fixture including the crossbar.

IMPORTANT: For a safe and secure installation, these fixtures must be installed by means of support that is independent of the outlet box.




SUGGESTED INSTALLATION:

4. Provide a 1/4" IPS pipe with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the outlet box as shown.
5. Assemble nipple and hickey to center 1/4" IPS support pipe.
6. Lace the fixture wires, ground and safety cable through the reinforcement plate and canopy, exiting through the side of hickey. Run cable through the top of the outlet box and secure to structural member.
7. Fix reinforcement plate against wall using Screws (H) and Plastic Anchors (G).
8. While lifting light fixture, place canopy into the studs (I) of reinforcement plate and nipple, then screw it using three Cap nuts (E and F) tightly as shown in Fig. 2.
9. By measuring determine correct number of links needed for proper hanging height. Use a pair of pliers to open one end link of the chain and discard un-wanted chain. Attach the chain to the ceiling loop


CONNECTING THE WIRES (Fig. 3)

10. At this point, connect the electrical wires as shown in Fig. 3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures Ground Wire to it.
11. Tuck these wire connections neatly into the ceiling junction box and then raise the canopy all the way to the ceiling.
12. Install the light bulbs in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
13. Lift the fixture and attach the End Loop onto the top loop of fixture.

Your installation is now complete. Return power to the junction box and test the fixture.

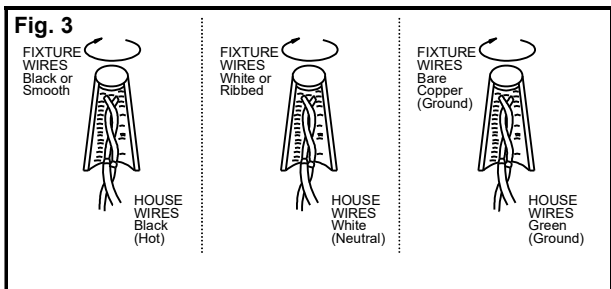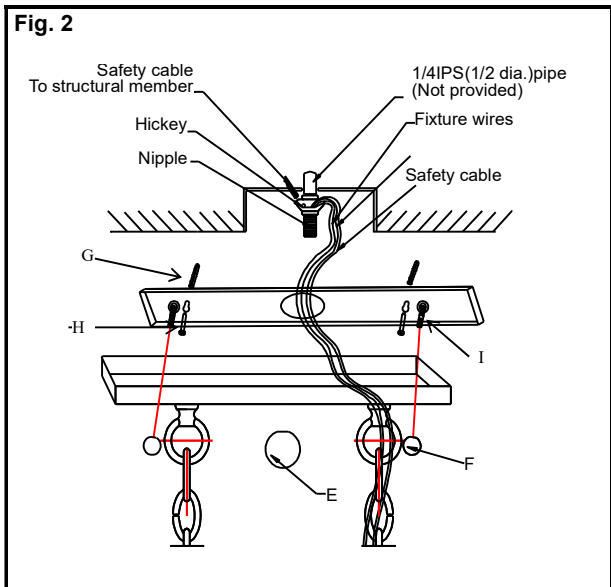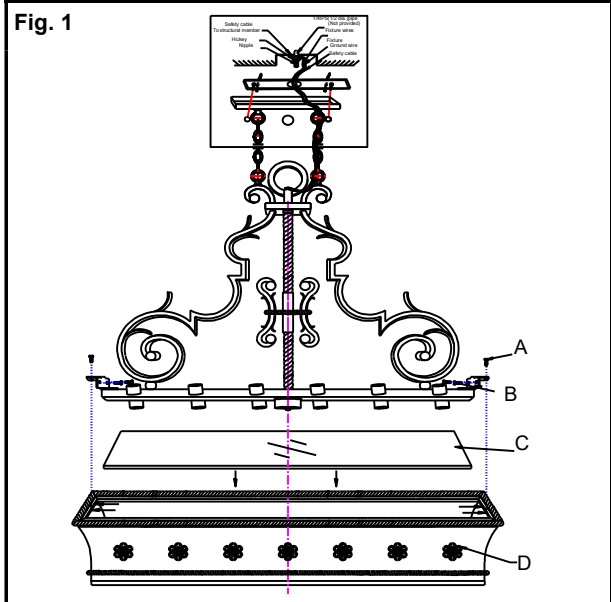

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

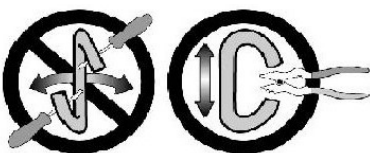

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



american
lighting
association

LA-595E