

INSTALLATION INSTRUCTIONS

For Item #N6242 (Rev. 05/29/2012)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the circuit breaker and remove old fixture from ceiling.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Secure Fixture Loop (A) onto Nipple (B) tightly and pull wires until taut.
4. Adjust Arms (L) to a proper position and making each hole of the bottom of Arms (L) and Joint (N) corresponding, secured with Screw (M).

HANGING THE FIXTURE (Fig. 2)

5. Thread Nipple into Loop until snug.
6. Thread other end of Nipple with Loop attached into crossbar until snug.
7. Place Lock Washer over end of Nipple protruding through crossbar and thread Hex Nut onto nipple until tight.
8. Take the crossbar assembly and mount to ceiling junction box with junction box screws. Tighten screws securely with screwdriver.
9. By measuring determine correct number of links needed for proper hanging height.
10. Use a pair of pliers to open one end link of the chain, attach the chain to the fixture's loop, and close the link. Slip Lock Collar followed by the Canopy over the chain.
11. Open the other end link of the chain and lift the fixture to attach to the ceiling loop, close the chain link.
12. Lace the fixture's wires through the loop and Nipple and pull until taut.

CONNECTING THE WIRES (Fig. 3)

13. At this point, connect the electrical wire as shown in (Fig.3) making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the crossbar using the Green Screw provided.
14. Tuck these wire connections neatly into the ceiling junction box and then raise the canopy all the way to the ceiling. Raise the Lock Collar and thread onto ceiling Loop protruding through canopy.

FINISHING THE FIXTURE (Fig.1)

15. Secure Pipe (H) onto Bottom Coupling (G) tightly.
16. Place Glass Shade (I) and Metal Leaf (J) over Pipe (H) and secure them using Finial (K) tightly.
17. Install the light bulbs in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
18. Place Glass Shields (D) over Studs (E) and keep Glass Shields (D) onto Support Plate (F), then Secure them using Knurled Knobs (C) tightly.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

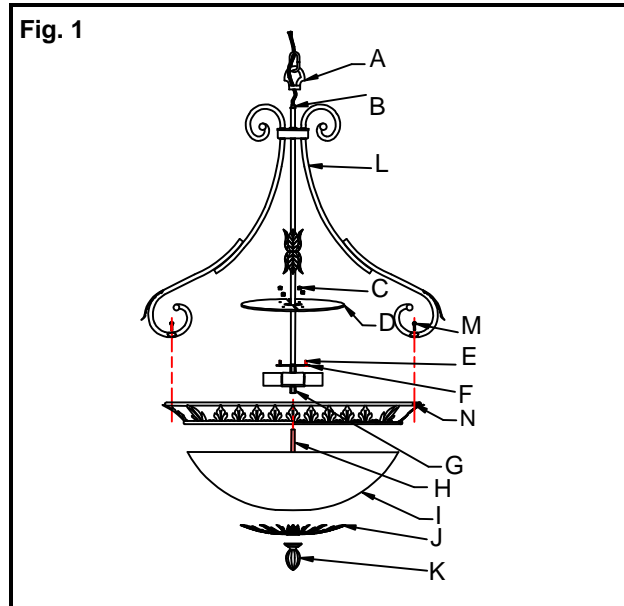


Fig. 2


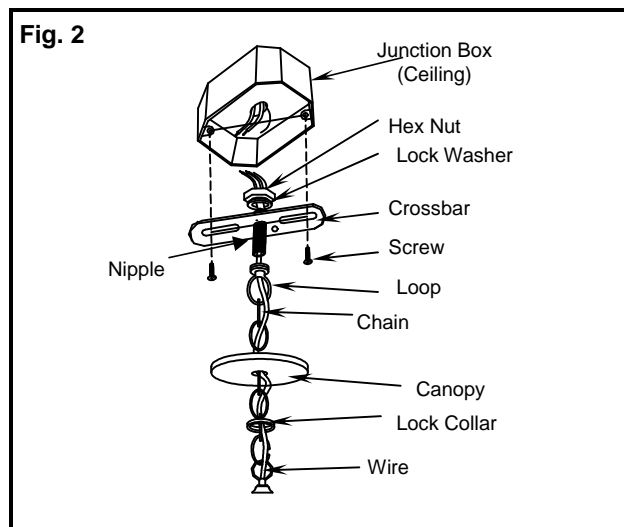


Fig. 3



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

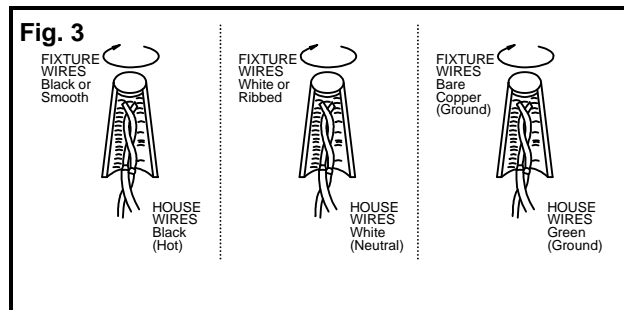