

# INSTALLATION INSTRUCTIONS FOR N6457-652

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .  
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## ASSEMBLY THE FIXTURE (Fig.2)

1. Shut off the power at the circuit breaker and remove the old fixture from ceiling, including the old crossbar.
2. Carefully unpack the new fixture and lay all the parts on a clear surface.
3. Set the arms to suitable position, see figure.2.

## HANGING THE FIXTURE (Fig.1)

4. Take this crossbar (B) and mount to ceiling junction box with junction box screws (C) (Size: #8-32\*1/2"L). Tighten screws securely with screwdriver. The side of the crossbar marked "GND" must face out.

## CONNECTING THE WIRES (Fig.3)


5. Take the black wire from the ceiling junction box and the smooth wire leg from the fixture and twist bare ends together. Twist wire connector onto end of wire until snug.
6. Repeat same process with white junction box wire and ribbed wire leg of fixture wire. **NOTE:** Twist wires together in the same direction you twist the wire connector onto wires.
7. If your junction box has a grounding wire (green or bare copper), attach this wire and the bare copper wire from the fixture together as step 1. If junction box has no ground wire, attach the bare copper fixture wire to the green ground screw (Screw: #8-32\*3/8"L) on the crossbar.
8. Tuck these wire connections neatly into the ceiling outlet box and then raise the fixture canopy all the way to the ceiling.

## COMPLETING THE INSTALLATION (Fig.2)


9. Place the fixture canopy (D) over the nipple (A), and then tighten it with ball nut (E).
10. Thread the pipe nipple (K) into bottom center of the fixture body (S) and lock it securely with the hex nut of the pipe nipple (K). Attach the column (L), the ring (M) and the frame (N) to bottom of the fixture body (S), aligning the hole with pipe nipple and screw it with ball nut (O).
11. Place the tube (H) over the socket of the fixture body (S).
12. Install the light bulbs (not included) in accordance with the fixture's specifications: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
13. Hang the crystals (F), the crystals (J) and the crystals (I) to the loop of the arm (G).
14. Hang the crystals (Q) and the crystals (I) to the loop of the arm (R).
15. Hang the crystals (J) to the loop of the frame (N).
16. Hang the crystal (P) to the loop of the ball nut (O).

Your installation is now complete. Return power to the junction box and test the fixture.

**Fig.1**

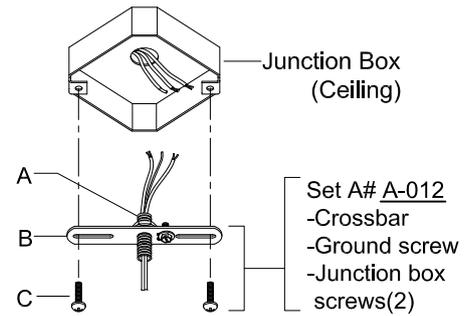

**Fig.2**

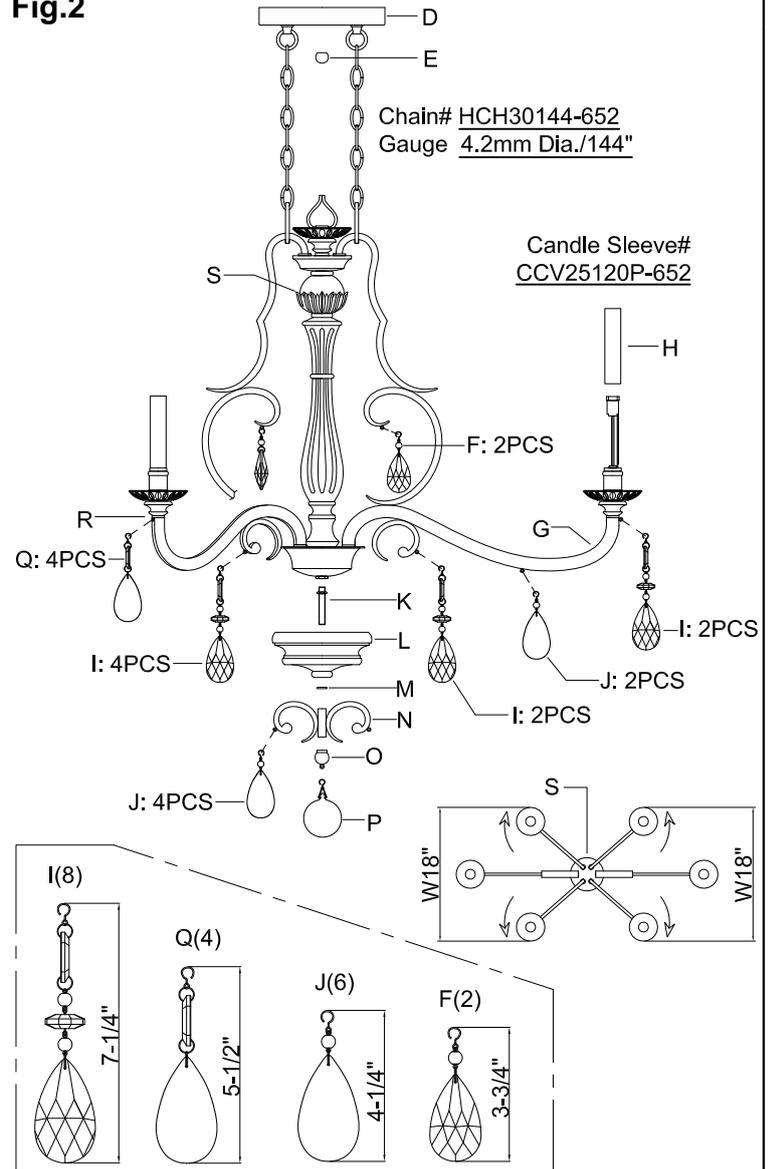

## CHAIN HUNG FIXTURE INSTRUCTION

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



**Fig.3**

