

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.2)

1. Carefully unpack your new fixture and lay out all the parts on a clear area. Make sure not to misplace any small parts necessary for installation.
2. Set the arms to a suitable position, see figure.2.
3. Attach loop (A) to fixture body (B) by turning it clockwise until tight.

HANGING THE FIXTURE (Fig.1)

IMPORTANT: For a safe and secure installation, this fixture must be installed by means of support that is independent of the outlet box.

SUGGESTED INSTALLATION:

4. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old crossbar.
5. Provide a 1/4" IPS pipe with one end securely mounted to a beam or a structural member. The other end should protrude through the center of outlet box as shown.
6. Assemble the ceiling loop, all-thread, nuts and hickey to center 1/4" IPS support pipe and adjust overall length to allow the lock collar to hold canopy flush to ceiling. When the adjustments have been completed, secure three (3) nuts, as shown.
7. Attach chain to fixture loop. Slip lock collar and canopy over upper end of chain. Open link of chain and lift fixture to attach to ceiling loop and secure open link.
8. Lace fixture wires, ground wire and safety cable through chain and loop, exiting through the side of hickey. Run safety cable through top of the outlet box and secure to structural member.

CONNECTING THE WIRES (Fig.3)

9. At this point, connect the electrical wires as shown in Fig.3 making sure all wire nuts are secured. You may have to wrap connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise connect fixture's ground wire directly to junction box.
10. Tuck wire connections neatly into ceiling junction box.
11. Raise lock collar and thread onto ceiling loop protruding through canopy.

COMPLETING THE INSTALLATION (Fig.2)

12. Thread all-thread (I) into bottom center of fixture body (B) by turning it clockwise until tight. Attach column (J), cover (K), frame (L) and cover (K) to bottom of fixture body (B), aligning the hole with all-thread and secure with decorative nut (M).
13. Place candle sleeve (C) and glass cup (S) over socket of fixture body (B).
14. Install the light bulbs (Not Included) in accordance with the fixture's specifications: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
15. Hang crystals (D) to top loop of arm (E).
16. Hang crystals (F), crystals (G) and crystals (H) to loop of arm (E) and arm (P).
17. Hang crystals (G) and crystals (Q) to loop of arm (R).
18. Hang crystals (O) to loop of frame (L).
19. Hang crystal (N) to loop of ball nut (M).

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1


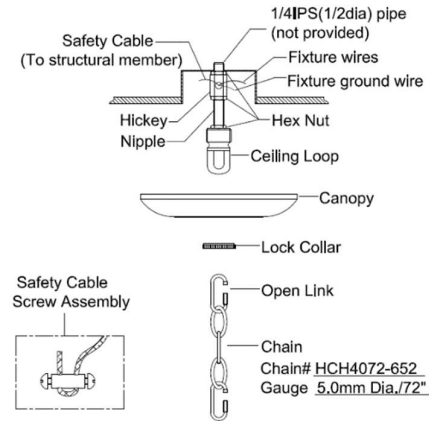


Fig.2

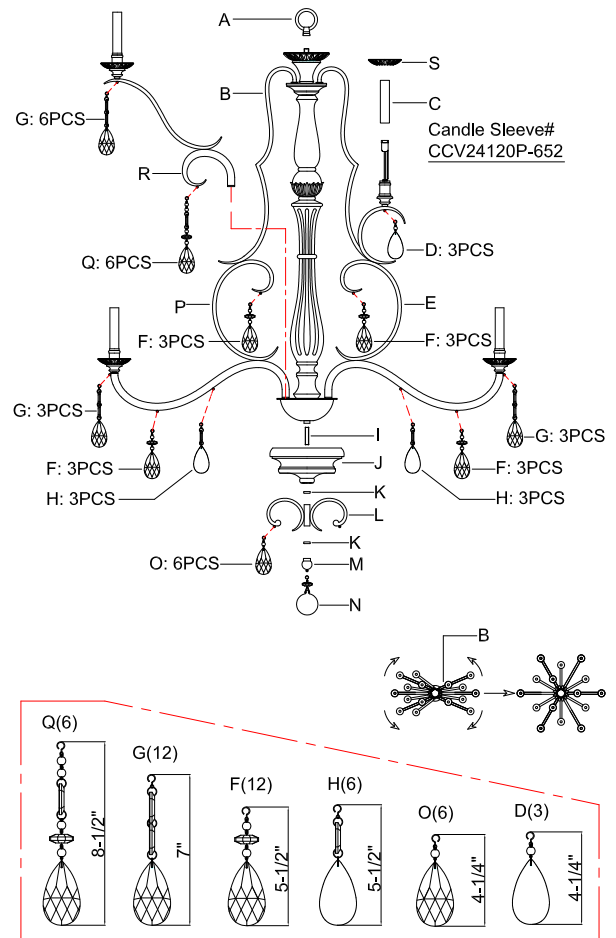

CHAIN HUNG FIXTURE INSTRUCTION

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

Fig.3

