

INSTALLATION INSTRUCTION FOR N6518/N6519

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.
READ AND SAVE THESE INSTRUCTIONS


ASSEMBLING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Allow the pipe (P) to pass through the pipe (Q), the cap (R) and the decorative leaves (S), and thread the pipe (P) onto the nipple (T).
3. Install the shades (X) and the tubes (Y) over the sockets (W), and secure with the retaining rings (Z).
4. Thread the finial (V) onto the nipple (U).

HANGING THE FIXTURE (Fig. 2)

5. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the crossbar.
6. Install a 1/4" IPS pipe (A) (not provided) with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box as shown.
7. Using the nut (B) to secure the hickey (C) to the nipple (E) which from customer unit (Not provided).
8. Thread the nut (D) onto the nipple (E), thread the nipple (E) into the hickey (C), and secure with the nut (D).
9. Thread loop (K) onto the nipple (E). Slide canopy (I) over loop (K), and then slide loop ring (J) over loop (K).
10. Open key link (L), connect loop (K) to one end link of the chain (M) (provided) and close the key link (L).(FIG.2)
11. By measuring, determine correct number of links needed for proper hanging height.
12. Open key link (N), connect link (O) to one end link of the chain (M) (provided) and close the key link (N).(FIG.2)
13. Lace the fixture wires, ground and safety cable (F) through the chain (M), the loop (K), exiting through the side of hickey (C). Run cable (F) through the top of the junction box and secure to structural member.
14. Lace safety cable (F) through hickey (C) and copper pipe (H), then secure with screw (G).

CONNECTING THE WIRES (Fig. 3)

15. At this point, connect the electrical wires as shown in (Fig. 3) making sure all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise connect fixture's ground wire directly to the crossbar using the green screw provided.
16. Tuck these wire connections neatly into the ceiling junction box and then raise the canopy (I) all the way to the ceiling. Raise the loop ring (J) and thread onto the loop (K) protruding through canopy (I). (Fig.2)
17. Install the light bulbs (E27, A type ) in accordance with the fixture's specification:

(DO NOT EXCEED THE SPECIFIED WATTAGE!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).

Your installation is now complete. Return power to the junction box and test the fixture.

WARNING:

1. This luminary must be mounted or supported independently of an outlet box.
2. Shades are fragile. Please handle with care.

Fig.1

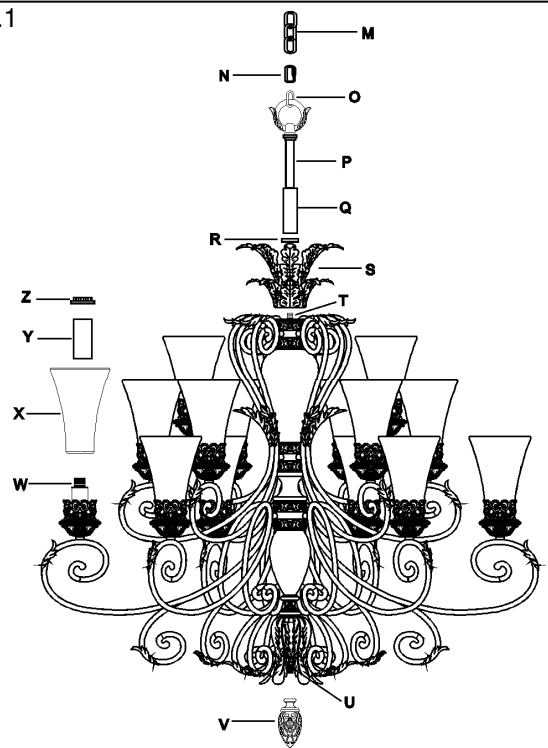


Fig.2



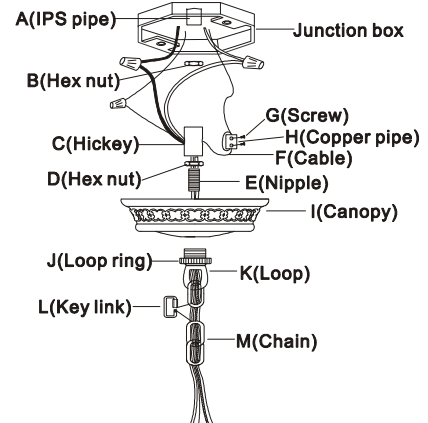


Fig.3

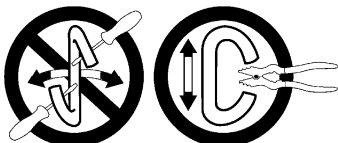

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

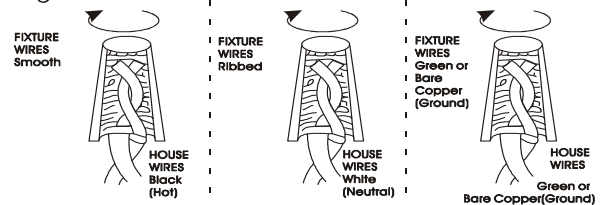