

INSTALLATION INSTRUCTIONS

For Model N6701-254

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 2)

1. Carefully remove the fixture from the carton and check the all parts are included as shown in the illustration.
2. Thread the Finial (I) to the top of fixture and secure it until tight.
3. Place the Glass Panels (A) into the side of the frame and secure them by Clips on the bottom.
4. Secure the arm to stud of fixture with ball nut (L). Holding the frame towards the arms, adjust the holes in the arms and frame to fitting for the studs, then secure them with ball nut with studs (P) and ball nuts (U).
5. Install the G9 bulb to the socket, put glass shade (O) over the socket and secure it to the lamp cup until tight. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
6. Attach crystal drop (K) with link (J) on the arm. Attach crystal drop (N) with link (M) on the arm.

HANGING THE FIXTURE (Fig. 1)

7. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old crossbar.
8. Thread nipple (E) through crossbar (C). Place lock washer (B) over end of nipple (E) protruding through crossbar (C) and thread hex nut (A) onto nipple (E) until tight.
9. Take this crossbar assembly and mount to ceiling outlet box with screws (D). Tighten screws securely with screwdriver. The side of the crossbar marked "GND" must face out.
10. Thread other end of nipple (E) with ceiling loop (H) until snug.
11. Feed the fixture wires through the chain, ceiling loop (H) and nipple (E), then pull the wires until taut.
12. Attach the chain to fixture loop with quick link. Slip lock collar (G) and canopy (F) over the upper end of the chain. Attach the chain to ceiling loop (H) with quick link.

COMPLETE INSTALLATION:

13. At this point, connect the electrical wires as shown in (Fig.3) making sure all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Other wise connect fixture's ground wire directly to the junction box. (Fig.3)
14. Tuck these wire connections neatly into the outlet box and then raise canopy (F) all the way to the ceiling. Raise the lock collar (G) and thread onto ceiling loop (H) protruding through canopy (F). (Fig.1)
15. Attach ball (T) with link (R) on bottom finial. Attach crystal drop (S) with link (Q) on the leaf. (Fig.2)

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1


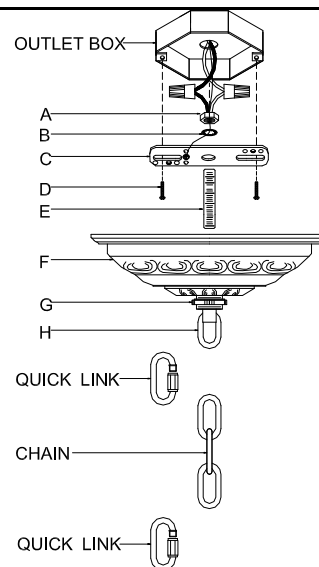



Fig.2

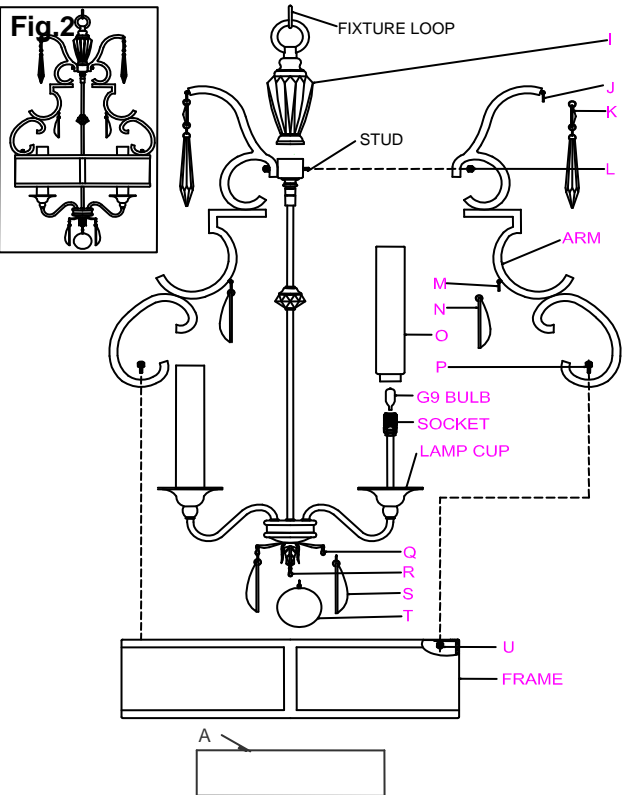

Notice: It is important to use proper chain pliers (not included)

To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the

Fig.3

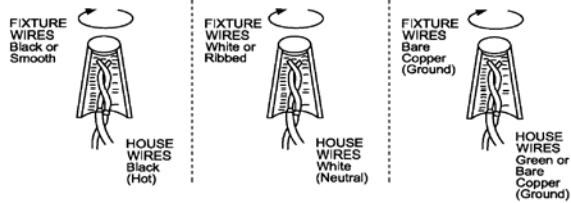

LA-1925E