

INSTALLATION INSTRUCTIONS

Item#N6953-1 (Rev. 11/24/2015)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the mounting hardware.
3. Place the Glass Shade (H) into the Fixture body (G), while holding the glass shade and align the holes on the Metal Ring (I) to bottom of Fixture Body (G) and secure with Screws (J).
4. Determine length desired and Down Rods (F) to Canopy (C) and Fixture Body (G).
5. Attach the Mounting Plate (A) to the Outlet Box using the two screws (B). The side of the mounting Plate marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

6. At this point, connect the electrical wire as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures Ground Wire to it. Otherwise, connect the fixture Ground Wire directly to the reinforcement plate using the Green Screw provided.

FINISHING THE INSTALLATION (Fig. 1)

7. Place Canopy (C) over the Mounting Plate (A) and fasten with Screws (D) by using Allen Wrench (E) provided.
8. Install light bulb (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

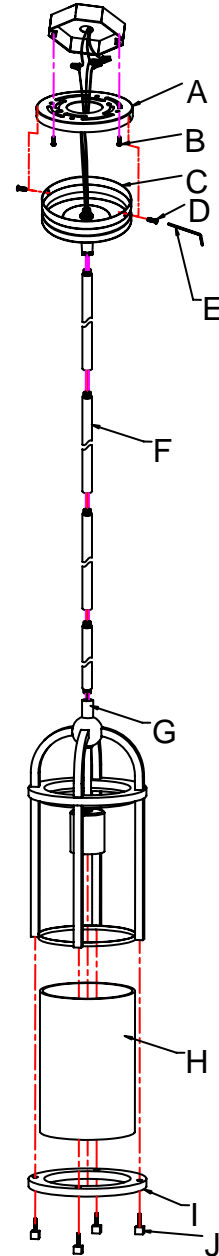


Fig. 2

