

INSTALLATION INSTRUCTIONS

Item #N6970-1-267B (Rev. 11/25/2015)
READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.
2. Carefully unpack the new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.

SUGGESTED INSTALLATION (Fig. 2)

3. Attach the mounting plate (A) to the junction box using screws (B). The side of the mounting plate marked "GND" must face out.
4. Determine the desired hanging height and thread rods (F1, F2 and F3) to the nipple (G). Pass the wires carefully through each rod as you assemble. Note: remove the nipple if installing with one 6" rod only.
5. Place the screws (N) over plastic washer (O), glass shield (P) and secure them to bottom of metal frame (L).
6. Install the light bulbs (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
7. Place the glass shade (M), metal mesh (K) over the metal frame (L), then secure the socket assembly (I) to metal frame (L) by using screw (H).
8. Place the canopy (C) over rods (F) and thread the hanger ball (E) to rods (F).
9. Install the fixture body into the mounting plate (A) by tilting at a slight angle so that the hanger ball (E) slips into the mounting plate (A) as shown. Align the notch in the hanger ball (E) to the tab on the mounting plate (A) to prevent the fixture from turning.

CONNECTING THE WIRES (Fig. 3)

10. At this point, connect the electrical wires as shown in figure 3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the ground wires from the hanger ball and mounting plate to it. Otherwise, connect the ground wire from the hanger ball directly to the mounting plate ground wire and secure with the wire connectors provided. After wires are connected, tuck them carefully into the ceiling junction box.


COMPLETING THE INSTALLATION (Fig. 1)

11. Align the canopy (C) over the mounting plate (A) and secure with screws (D).

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

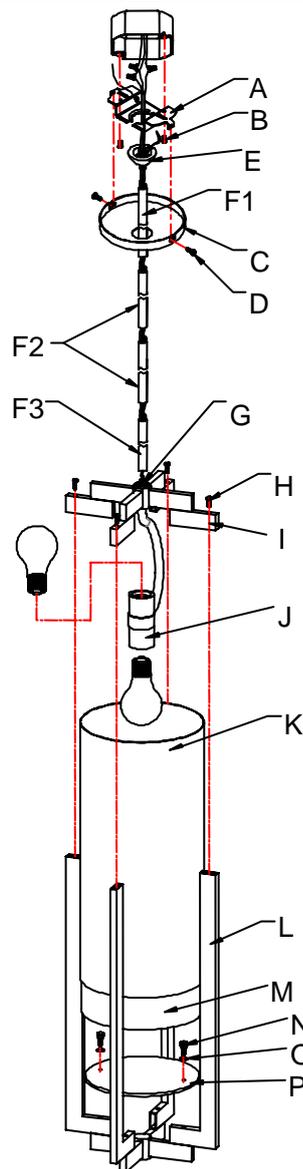

Set# LTG BKT 10

- Mounting plate
- Ground screw
- Mounting Screw*2

Rod# W30-1-267B*1(F1)

- W30-1-267B*2(F2)
- W30-H-267B*1(F3)

Fig. 3



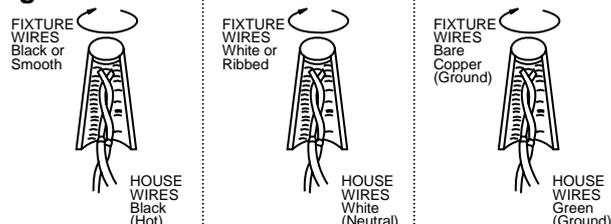


Fig.2

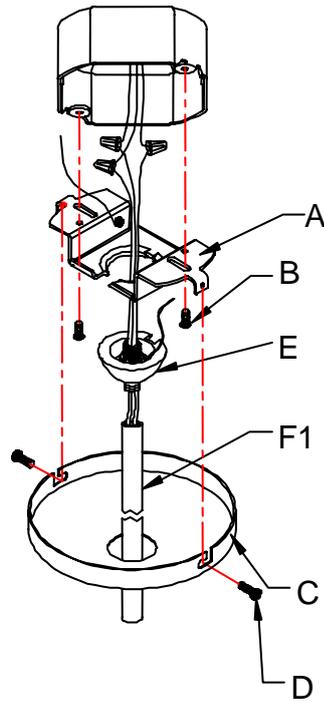

a. Hardware Bag:

- A. Mounting Plate*1
- C. Canopy*1
- D. Screw*2
- E. Hanger Ball*1

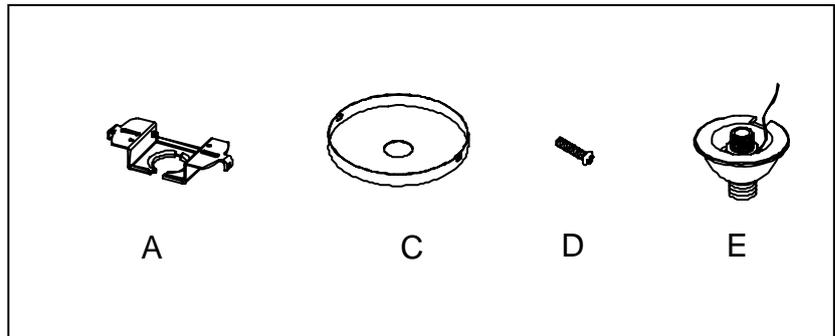

b. Hardware Bag:

- F1. ROD 12"*1
- F2. ROD 12"*2
- F3. ROD 6"*1

