

# INSTALLATION INSTRUCTIONS

Item #N7135-597/N7136-597 For Pendant (03/27/2017)

## READ AND SAVE THESE INSTRUCTIONS


**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.
2. Carefully unpack the new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.
3. The mounting strap contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your fixture canopy and thread the two fixture screws 1/4 into the fixture mounting strap.
4. Attach mounting strap to the outlet box using the box screws (Size: #8-32\*0.5L). The side of the mounting strap marked "GND" must face out.

### PREPARING THE FIXTURE (Fig.2)

5. By measuring, determine the desired hanging height and thread rods (B) into the top nipple of the fixture body. Please remove the nipple if installing with one 6" rod only.
6. Carefully pass the fixture wires through each rod as you assemble.
7. Pass the wires through the swivel and canopy (C) and pull tight. Then thread the swivel onto the top of rods.
8. Place supporting cable through lock and secure with screw, Place the supporting cable through mounting strap and lock and secure with screw.

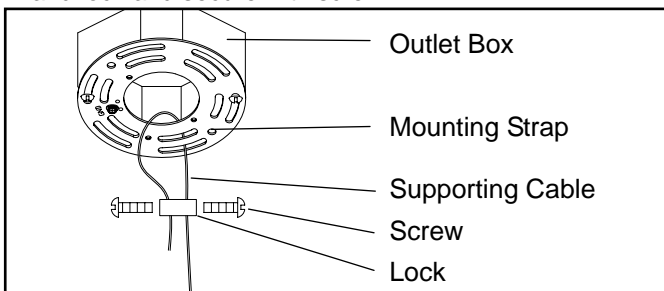

### CONNECTING THE WIRES (Fig. 3)

9. At this point, connect the electrical wires as shown in Fig. 3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting strap using the green screw provided. After the wires are connected, tuck them carefully inside the outlet box.


### FINISHING THE INSTALLATION (Fig.1 & 2)

9. Place fixture canopy (C) over two fixture screws (or nipple) and secure with decorative nuts.
10. Place candle tube (A) on the socket.
11. Install the bulb in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)** NOTE: BULBS WILL BE HOT!! ALLOW 10 MINUTES FOR BULBS TO COOL BEFORE HANDLING.

Your installation is now complete. Return power to the outlet box and test the fixture.

**Note:** Illustration on this manual is for installation purposes only. It may or may not be identical to the fixture purchased. Do not clean your light fixture or parts with water or cleanser.

Fig.1

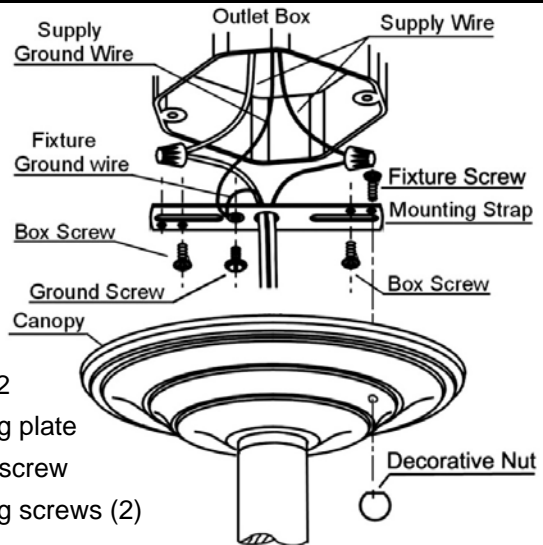

Set A-012

- Mounting plate
- Ground screw
- Mounting screws (2)

Fig.2


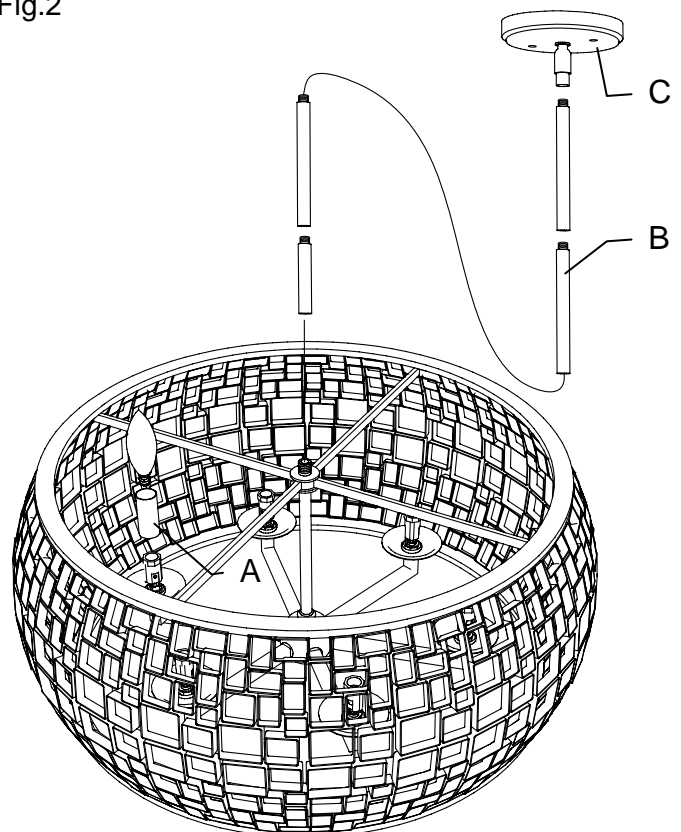


Fig.3

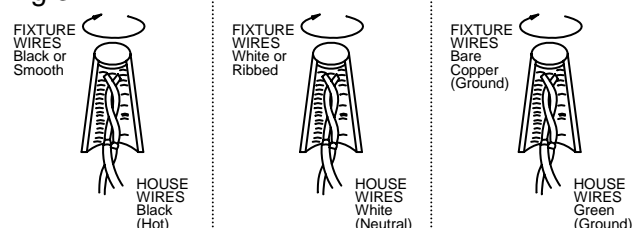

american  
lighting  
association

# INSTALLATION INSTRUCTIONS

Item #N7135-597/N7136-597 For Semi-Flush (03/27/2017)

## READ AND SAVE THESE INSTRUCTIONS


**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.
2. Carefully unpack the new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.
3. The mounting strap contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your fixture canopy and thread the two fixture screws 1/4 into the fixture mounting strap.
4. Attach mounting strap to the outlet box using the box screws (Size: #8-32\*0.5L). The side of the mounting strap marked "GND" must face out.

### PREPARING THE FIXTURE (Fig.2)

5. Thread rods (B) into the top nipple of the fixture body.
6. Carefully pass the fixture wires through rod as you assemble.
7. Pass the wires through the swivel and canopy (C) and pull tight. Then thread the swivel onto the top of rods.
8. Place supporting cable through lock and secure with screw. Place the supporting cable through mounting strap and lock and secure with screw.

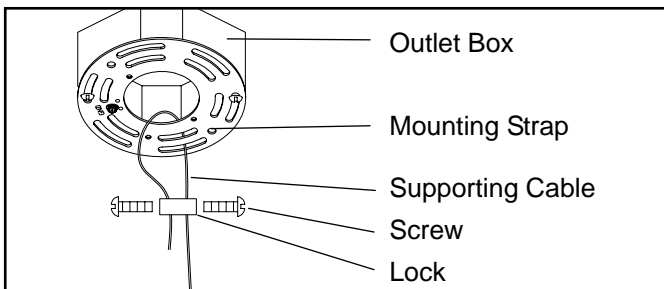

### CONNECTING THE WIRES (Fig. 3)

9. At this point, connect the electrical wires as shown in Fig. 3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting strap using the green screw provided. After the wires are connected, tuck them carefully inside the outlet box.

### FINISHING THE INSTALLATION (Fig.1 & 2)

9. Place fixture canopy (C) over two fixture screws (or nipple) and secure with decorative nuts.
10. Place candle tube (A) on the socket.
11. Install the bulb in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)** NOTE: BULBS WILL BE HOT!! ALLOW 10 MINUTES FOR BULBS TO COOL BEFORE HANDLING.

Your installation is now complete. Return power to the outlet box and test the fixture.

**Note:** Illustration on this manual is for installation purposes only. It may or may not be identical to the fixture purchased. Do not clean your light fixture or parts with water or cleanser.

Fig.1

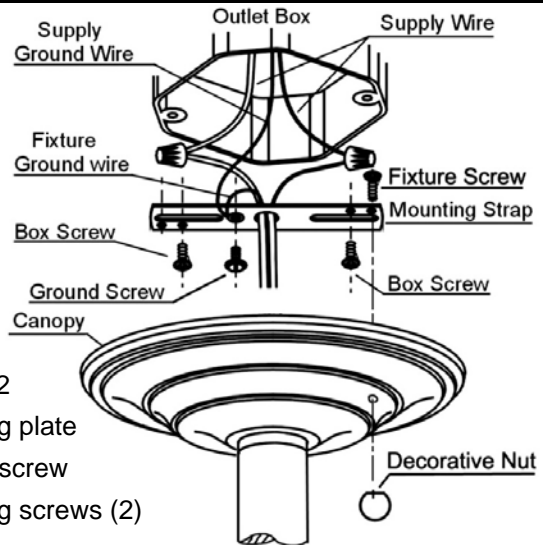


Fig.2


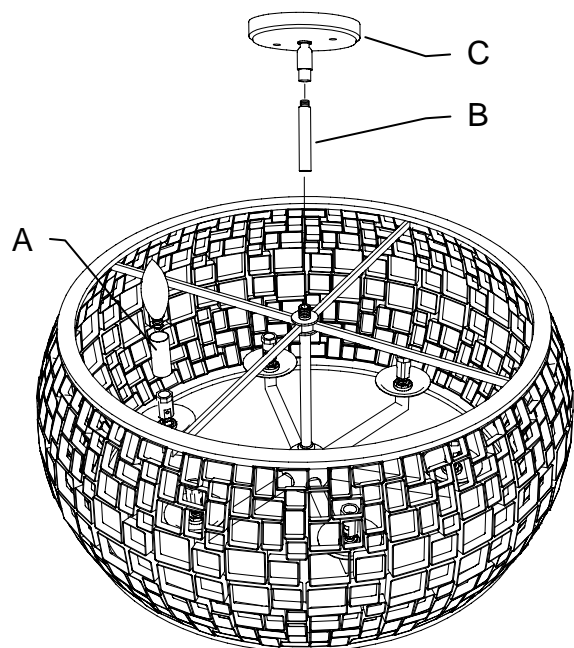


Fig.3

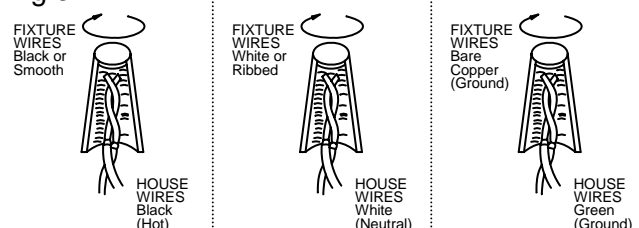

american  
lighting  
association