

INSTALLATION INSTRUCTIONS

Item # N7139-597 (03/16/2017)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.2)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove old fixture from ceiling including the mounting hardware.
2. Carefully unpack new fixture and lay all the parts on a clear surface.
3. Uninstall the screws (A) and take out the socket assembly (B).
4. Place candle tube (C) over socket.
5. Install the light bulbs in accordance with the fixtures specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE.**
6. Load the socket assembly (B) into the frame (D) and secure with screws (A).

HANGING THE FIXTURE (Fig.1)

7. Provide a 1/4" IPS pipe with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the outlet box.
8. Assemble the ceiling loop, nipple, hex nuts and hickey to the center 1/4 IPS support pipe and adjust the overall length to allow the lock collar to hold the canopy flush to the ceiling. When the adjustments have been completed, secure the three hex nuts.
9. Attach the chain to the fixture loop using the lock link. The lock link must be completely closed when installed. By measuring, determine the correct number of links needed for proper hanging height. Use a pair of chain pliers to open one end link of the chain, and discard un-wanted chain. Then attach the other end link of the chain to the ceiling loop using the other lock link.
10. Lace the fixture wires, ground and safety cable through the chain and loop, exiting through the side of the hickey. Tie off the set screw assembly as shown. Run the cable through the top of the outlet box and secure to a structural member.

CONNECTING THE WIRES (Fig.3)

11. Connect the electrical wires as shown in (Fig.3), making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. After wires are connected, tuck them carefully into the ceiling outlet box.
12. Raise the canopy all the way to the ceiling. Then raise the loop collar and thread onto ceiling loop protruding through can through canopy.

Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: For a safe and secure installation, these fixtures must be installed by means of supports that are independent of the outlet box.

Note: Illustration on this manual is for installation purposes only. It may or may not be identical to the fixture purchased. Do not clean your light fixture or parts with water or cleanser.

Fig. 1

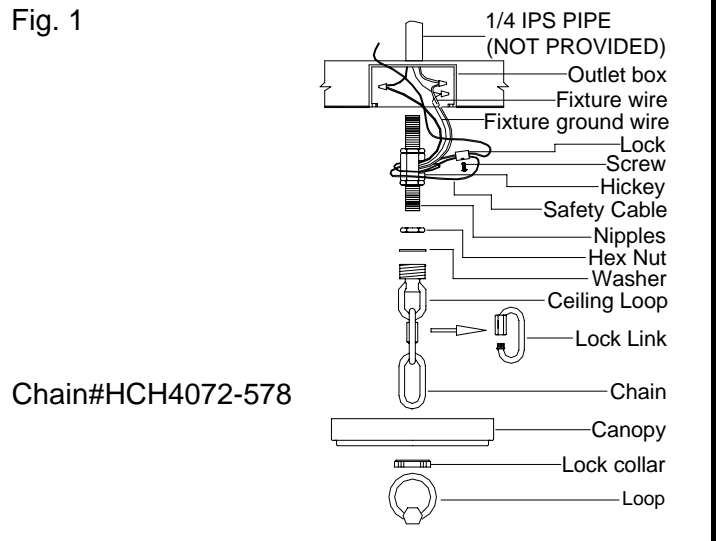


Fig. 2


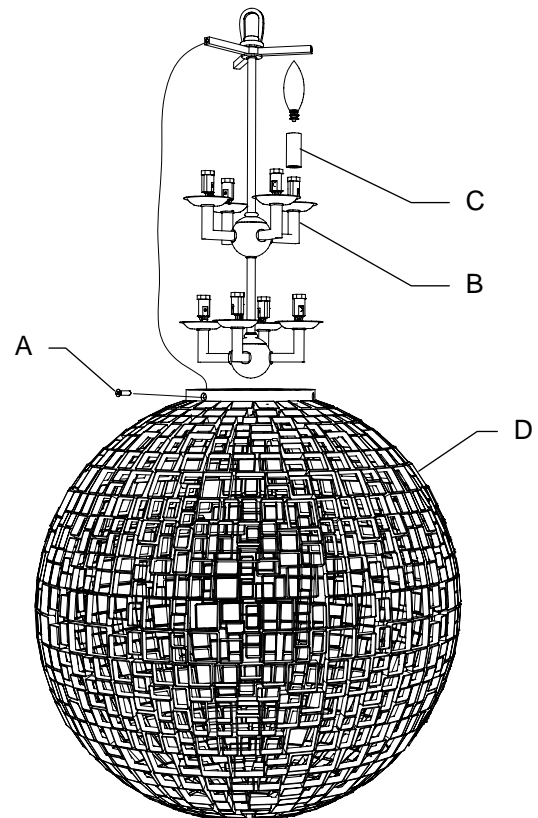


Fig.3



CHAIN HUNG FIXTURE INSTRUCTION

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

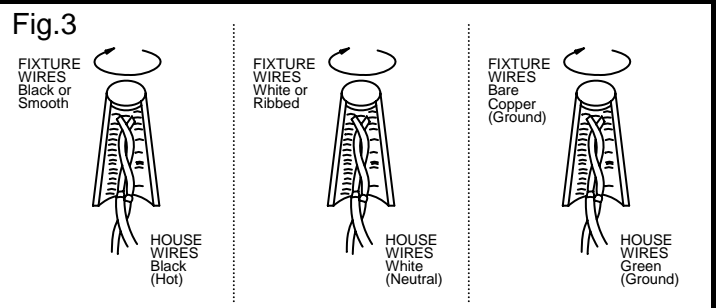