

INSTALLATION INSTRUCTIONS FOR N7254-613

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

- 1 Shut off power at the fuse box or circuit breaker box. If necessary, remove the existing fixture and its mounting hardware.
- 2 Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
- 3 This fixture includes three 12", and one 6" rods. Determine the desired hanging height and thread rods (L) (Part#W35-1-613), (M) (Part#W35-H-613) to loop (K). Feed the fixture wire carefully through each rod. Please remove the nipple if installing with one 6" rod only.
- 4 Thread the loop (K) to rod unit snug.
- 5 Connect the loops (K) using quick link (J). The quick link (J) must be completely closed when installed.
- 6 Connect the hex nut (E) and cross bar (B) using the nipple (F), then secured the cross bar (B) to the outlet box (A) with provided screws (D) (Size: #8-32 5/8").
- 7 Secure with hex nut (E) on the other end of nipple (F). Thread loop (I) onto nipple (F) tightly.
- 8 Slip the lock collar (H) and canopy (G) over the rod.
- 9 Open quick link (J) and connect it to loop (I/K). Then thread the quick link closed. The other end should protrude through the center of the outlet box as shown.

CONNECTING THE WIRES (Fig.2)

- 10 Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the cross bar (B) using the green screw provided. Tuck the wire connections neatly into the ceiling junction box.
- 11 Raise canopy (G) onto the ceiling loop (I) to fix with lock collar (H)

WARNING: This luminaire must be mounted or supported independently of an outlet box.

COMPLETING THE INSTALLATION (Fig. 1)

1. Install the bulb(s) (Q) (not included) (4 x Max 60W Candelabra) into socket in accordance with the fixture's specifications. **(DO NOT EXCEED THE SPECIFIED WATTAGE!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
2. Take out the crystals (O) (total 12pcs) attached to fixture body using long screws (P) provided, secure with steel ball nut (N), add several plastic washers on the long screw (R) if needed. Adjust the crystals until they are secured tightly.

Your installation is now complete. Return power to junction box and test the fixture.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Fig.1

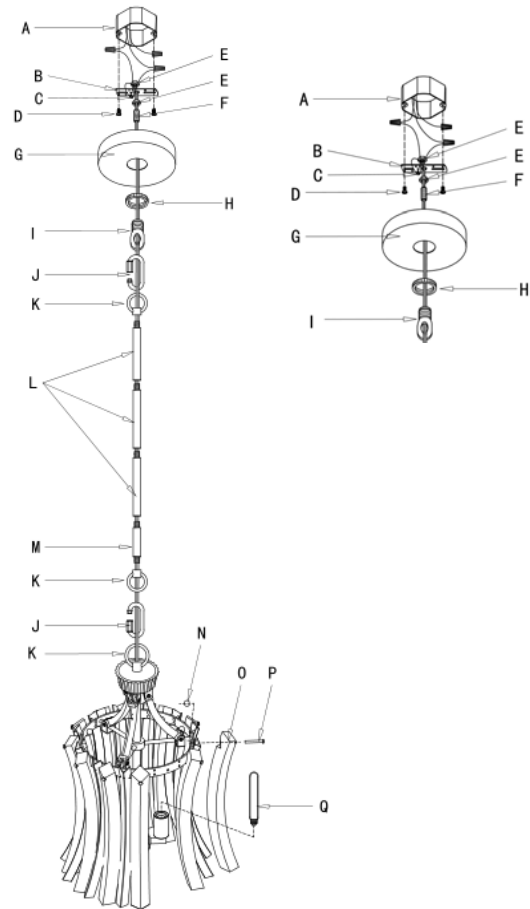


Fig.2

