

**INSTALLATION INSTRUCTIONS FOR FIXTURE**  
**Item#N7355-790 (Convertible Lamps for Semi Flush) (New. 2022/5/20)**

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

**PREPARATION (Fig. 4)**

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. The arms have been placed to lay flat for shipping. Adjust arms to proper position. (See Fig. 4) .

**ASSEMBLING THE FIXTURE (FIG. 1)**

4. Thread the stem (L) onto the all thread (M) of socket assembly (O)..
5. Thread the swivel (J) of the upper assembly onto the stem (L).
6. Carefully place the bolts (K) through holes on the top of the frame assembly (Q). Then tighten with plastic washer and finial (P).
7. Attach the mounting plate (S) to the junction box (Not included) using mounting screws (Z) (Size: #8-32N\*1"). The side of the mounting plate marked "GND" must face out.
8. The support cable is provided to support the weight of the fixture while wiring. Align the fixture to mounting plate (S) and attach hook (V) on the end of support cable (U) into a slot located on mounting plate (S). Carefully allow the support cable (U) to support the weight of the fixture while wiring.

**CONNECTING THE WIRE (Fig. 3)**




9. At this point, connect the electrical wires as shown in Fig.3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (S) using the green screw provided. Tuck the wire connectors neatly into the ceiling junction box.

**COMPLETING THE INSTALLATION (Fig. 1)**

10. Raise the canopy (X) to the mounting plate (S) and secure with screws (R).
11. Install (6) six candelabra base bulbs (N) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. **—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

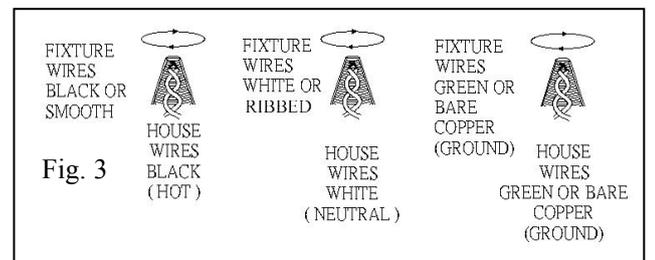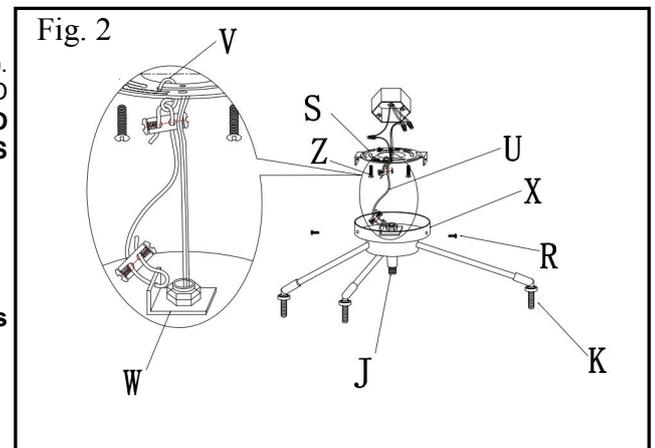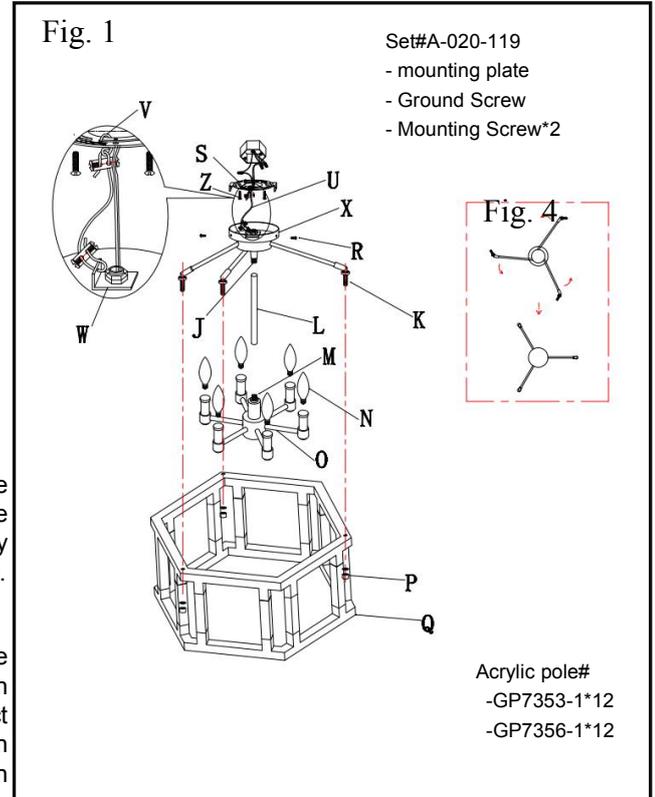

**INSTALLATION INSTRUCTIONS FOR FIXTURE**  
**Item#N7355-790 (Convertible Lamps for Pendant) (New. 2022/5/20)**

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

**PREPARATION (FIG. 2 & Fig. 5)**

1. Thread fixture loop (I) onto all thread of upper assembly (X).
2. Secure stems (L) to all thread (M) of socket assembly (O). Then thread upper assembly (X) to stem (L).
3. **Adjust arms to proper position.** (See Fig. 4) Carefully place bolts (K) through holes on top of frame assembly (Q). Then tighten with plastic washers and finials (P).

**ASSEMBLING THE FIXTURE (FIG. 6)**

4. Thread all thread (C) into ceiling loop (E) with lock washer (Y1) and hex nut (Y2) until snug.
5. Thread other end of all thread (C) into crossbar (A) with lock washer (Y1) and hex nut (Y2) until snug. Note: The length of all thread into crossbar may be adjusted if necessary.
6. Take crossbar assembly and mount to ceiling junction box (Not included) using mounting screws (B) (Size: # 8-32N\*L1"). The side of crossbar marked "GND" must face out.
7. Attach quick link (G) to fixture loop (I) and chain (H). Quick link must be completely closed when installed. By measuring, determine correct number of links needed for desired hanging height. Use a pair of chain pliers to open one end link of chain and discard excess chain. Slip lock collar (F), canopy decorative plate (T) and canopy (D) over chain (H). Attach another quick link (G) to other end of chain (H). Raise fixture and attach quick link (G) to ceiling loop (E), then close quick link (G). Carefully lace fixture wires through chain links and pull until tight. Feed wires through lock collar, canopy decorative plate, canopy, ceiling loop and all thread, then pull until tight.

**CONNECTING THE WIRE (Fig. 3)**




8. Connect the electrical wires as shown in Fig. 3, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to crossbar using the green screw provided.
9. Tuck wire connections neatly into junction box.

**COMPLETING THE INSTALLATION (Fig. 5)**

10. Raise canopy (D) and canopy decorative plate (T) to ceiling, then secure with lock collar (F).
12. Install (6) six candelabra base bulbs (N) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. **—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

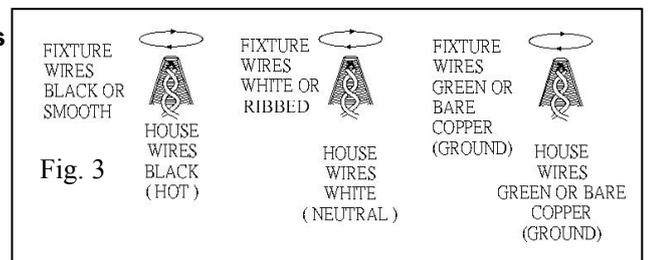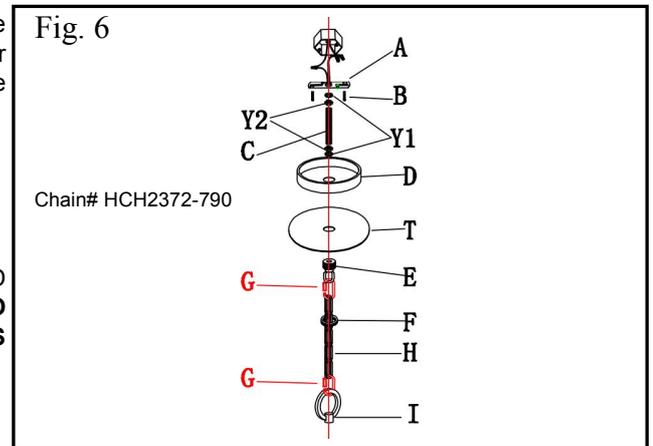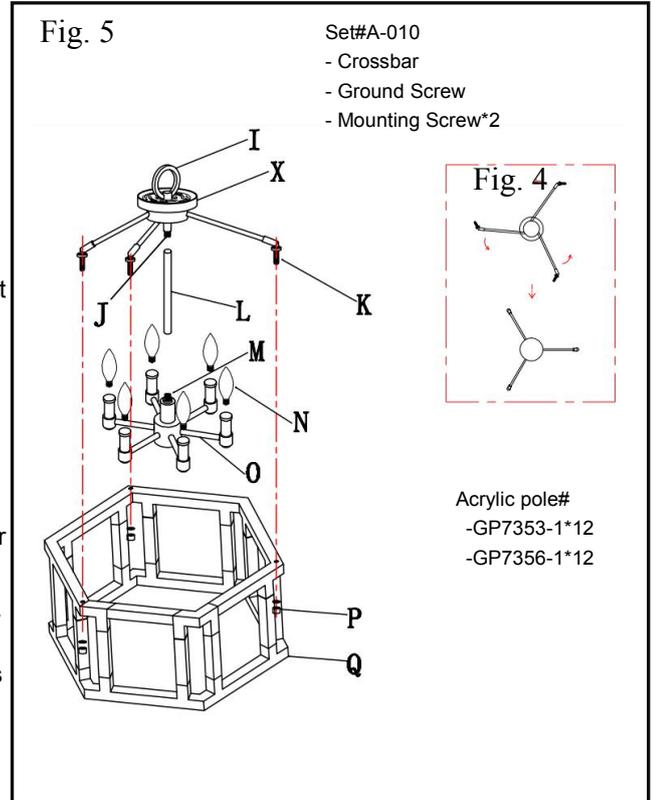

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

