

# INSTALLATION INSTRUCTIONS

Item#N7385-613 (New. 2022/05/15)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Secure rod (M) onto all thread (N) on fixture body.
4. Determine desired hanging height and thread rods (F1,F2,F3) to all thread on rod (M). Attach canopy (D) by threading onto rod (F1). Carefully pass wires through each rod during assembly. Note: Remove all thread, if installing with one 6" rod only.
5. Attach mounting plate (A) to junction box (not included), with mounting screws (B) (Size: #8-32N\*L0.5"). The side of mounting plate (A) marked "GND" marked and two convex points must face out.

### CONNECTING THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.
7. Tuck the wire connections neatly into junction box.

### FINISHING THE INSTALLATION (Fig.1)

8. Place canopy (D) over mounting plate (A) and secure with screws (E).
9. Thread acrylic rods (H1), (H2), (H3), (H4) into couplers (C1), (C2), (C3), (C4).
10. Place glass shade (Q) followed by metal ring (K) over socket (P) and secure with screw shell (J).
11. Install (4) four medium base bulbs (I) up to 100 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
12. Place cloth shade (L) onto glass shade (Q).
13. Secure finial (S) onto all thread (R) on fixture body.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1

Set# A-021-143D  
 -Mounting plate  
 -Ground screw  
 -Mounting screws \*2

Acrylic rod:  
 H1:L135mm \*4pcs  
 H2:L90mm \*4pcs  
 H3:L210mm \*4pcs  
 H4:L310mm \*4pcs

Rod# W35-1-613 \*1 (F1)  
 W35-1-613 \*2 (F2)  
 W35-H-613 \*1 (F3)


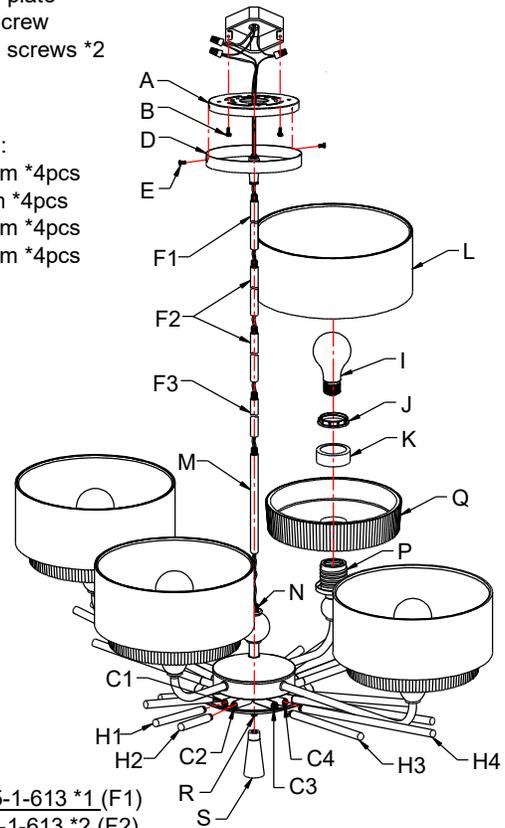


Fig. 2



**Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

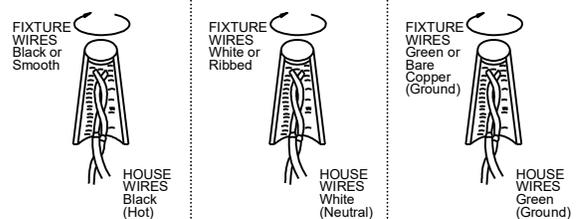