

# INSTALLATION INSTRUCTIONS

Item# N7506-77

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARING THE FIXTURE (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove old fixture including the mounting hardware.

2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.

### SUGGESTED INSTALLATION (Fig. 1)

1. This fixture includes 2\*23 1/4" rod and 2\*6" rod and 6\*12" rods. Determine the desired hanging height and thread rods (P, Q, R) to fixture body and firstly place the rod 1\*23 1/4" to nipple on the fixture body. Pass the wires carefully through each rod as you assemble. Please remove the nipple if installing with one 6" rod only.
2. **Position the mounting plate on the ceiling, and mark location of the mounting holes, Drill the holes on the ceiling, and then inserting the plastic anchors.**
3. Attach the mounting plate (C) to the junction box using mounting screws (F) (size: #8-32 0.5" L.) as illustrated in Fig. 1. The side of the circular strap marked "GND" must face out, **then secure the mounting plate (C) with the wood screws (F) through the four holes insert into the plastic anchors (A) & (B).** Then place hook (E) to the (C) onto the mounting plate to check the electrical wires..
3. While holding the fixture body, install the fixture into the mounting plate.

### CONNECTING THE WIRES (Fig. 3)

At this point, connect the electrical wire as shown in figure 3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the ground wires from the hanger ball and mounting plate to it. Otherwise, connect the ground wire from the hanger ball directly to the mounting plate ground wire and secure with wire connectors provided.

After the wires are connected, tuck them carefully into the ceiling junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

7. Install the bulb(s) (M) (not included) (6 x Max 60W Candelabra) into socket (N) in accordance with the fixture's specifications. **(DO NOT EXCEED THE SPECIFIED WATTAGE!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

8. Take out the crystals (L), then fit it between lamp body using provided screws (J) & (K) (Screws including long and short) and steel balls (I) tightly, Adjust the crystals until it fixed tightly. By the way, please get rid of the clear plastic washer provided if the screws shorter.

Fig.1

Set-Mounting#  
-A-021-390119  
-Mounting plate(1)  
-Green screw (1)  
-Mounting screw(2)

Rod#W35-1-  
77\*1(P)  
#W35-1-77\*3(Q)  
#W35-1-77\*1(R)  
Gauge 0.6"


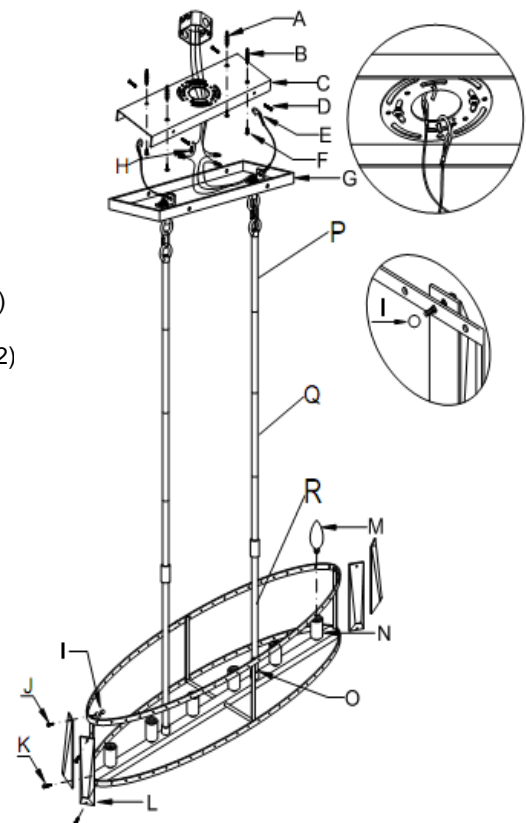


Fig.3

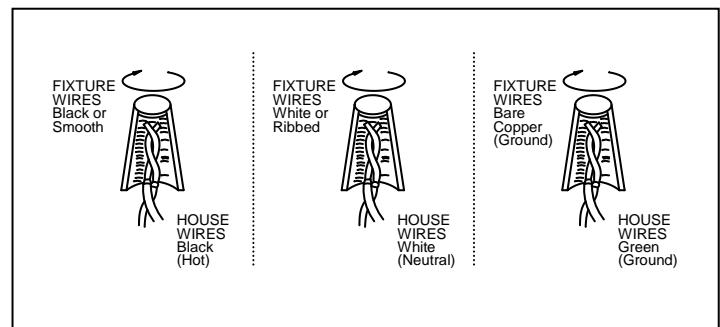

9. First please inset the four crystals placed ends of the oval lamp body as the chart showing (Fig.1), two crystals in each end, then inset other crystals.

Your installation is now complete. Return power to the junction box and test the fixture.

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

